

Kuboid 160 | 24 W | flood 45° | Projectors


Technical Specifications

| | |
|-------------------------------------|----------------------------------------------------|
| Source lamp | LED 24 W |
| Total wattage | 27 |
| Voltage | 220-240 Vac - 50/60 Hz |
| Control | On/Off • dimmable on request |
| Luminous flux (*Source flux) | 2342 lm (2700 lm*) @ 3000 K |
| Luminous efficacy | 86.7 lm/W @ 3000 K |
| McADAM steps | 3 |
| Beam | flood 45° |
| CRI | >90 |
| Life time | L 70 > 50.000 h Ta 25°C L 70 > 50.000 h Ta 40°C |
| IP rating | 67 |
| IK rating | 8 |
| Insulation class | I |


90°



16

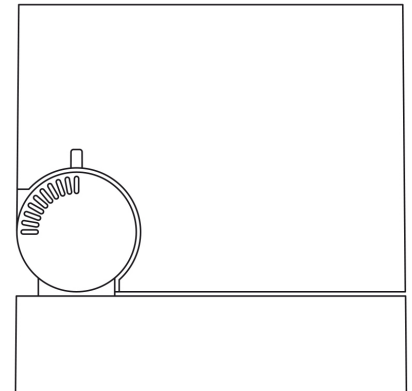

16




Materials

| | |
|------------------|--------------------------------|
| Body | Die-cast aluminium EN47100 |
| Diffuser | Serigraphed transparent glass |
| Finishing | Black - Polyester powder paint |

E (lux)

| H (m) | lux (3000 K) | Ø (m) |
|-------|--------------|-------|
| 1.00 | 3704 | 0.81 |
| 2.00 | 926 | 1.63 |
| 3.00 | 412 | 2.44 |
| 4.00 | 231 | 3.26 |
| 5.00 | 148 | 4.07 |

Photometry

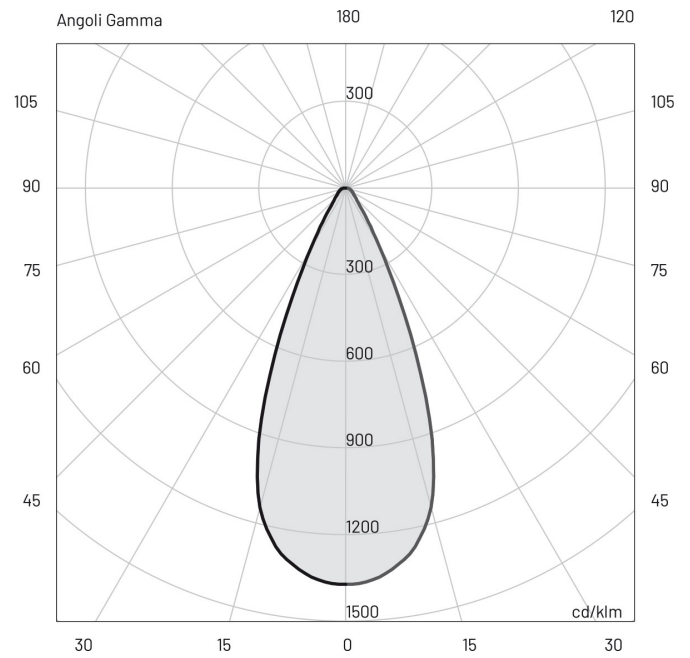

Available accessories

0404M010

Single connection IP68

00AKB60-80

Steel fixing kit - spike