




#### 5 / Product Color / Ürün Renk




#### 4 / Reflector Angle / Reflektör Açısı



\* See page 316 for ldt files. / Işık eğrileri için sayfa 316 bakınız.

#### Technical Drawing / Teknik Çizim

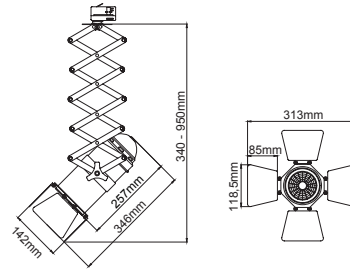

#### EN

- Die-cast aluminium body.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design with passive heat dissipation.
- With 3-phase universal track adaptor.
- Rotational arm structure maximizes the flexibility of the lamp house adjustment to different directions.
- Clear safety glass.
- Classic dimming systems of Phase-Cut, DALI and 1-10V Dim options.
- High tech control systems of Warm Dim and Wireless Dim options.
- Basic colours: White, Black, Gray, Dark Gray, RAL9010 and special color options.
- Available accesories are Honeycomb Filter and Colour Filter.
- Barn Door is already installed to the front of the fixture.
- Only Medium beam angle option available with rotationally symmetric light distribution.
- Standart CRI>80, high CRI>90 and super high CRI>98 LED options available.
- Up to 132lm/W efficiency.
- High colour consistency: <3 SDCM

#### TR

- Alüminyum enjeksiyon gövde.
- 220-240V / 50-60Hz enerji giriřli.
- Pasif soğutma teknolojisine sahip akıllı soğutma tasarımı.
- 3-Fazlı üniversal ray adaptörlü.
- Özel kol mekanizması sayesinde armatür ışık gövdesi yönlendirmesi her yöne esnek bir şekilde sağlanır.
- Tamperli cam.
- Klasik DALI ve 1-10V DIM seçenekleri uygulanabilir.
- Yüksek teknoloji kontrol sistemleri olan Kablosuz DIM ve Sıcak DIM uygulamaları yapılabilir.
- Standart renk seçenekleri: Beyaz, Siyah, Gri, Koyu Gri, RAL9010 yanında isteğe bağılı özel renk seçenekleri uygulanabilir.
- Balpeteđi Filtresi ve Renk Filtresi aksesuar seçenekleri uygulanabilir.
- Flap aksesuarı armatüre takılı bir şekilde gelmektedir.
- Sadece Orta açı reflektör seçeneđi mevcuttur.
- Standart CRI>80, yüksek CRI>90 ve ekstra yüksek CRI>98 LED seçenekleri mevcuttur.
- 132lm/W'a varan verim.
- Yüksek renk uyumu: <3 SDCM

## Canon / I01.MLT.03019










\* Code example / Kod örneği:

I01.MLT.03019 . 28 . 827 . ME . 01  
 1 2 3 4 5

- 1- Product code / Armatür kodu
- 2- Power / Güç
- 3- CRI / Kelvin
- 4- Reflector angle / Reflektör açısı
- 5- Colour / Ürün renk

Power / Güç	CRI	Order Code / Sipariş Kodu	Kelvin	Lümen T <sub>c</sub> =50° Lümen
28W	CRI>80	I01.MLT.03019 . (.) . (...) . (.) . (.)	2700K	3325
			3000K	3460
			3500K	3581
			4000K	3707
			5000K	3966
	CRI>90	I01.MLT.03019 . (.) . (...) . (.) . (.)	2700K	2993
			3000K	3068
			3500K	3178
			4000K	3286
			5000K	X
	CRI>98	I01.MLT.03019 . (.) . (...) . (.) . (.)	2700K	2300
			3000K	2384
			4000K	2550
	Meat / Et COB	I01.MLT.03019 . (.) . (...) . (.) . (.)	1800K	1914
	Food / Gıda COB	I01.MLT.03019 . (.) . (...) . (.) . (.)	2400K	1971
	FISH / Balık COB	I01.MLT.03019 . (.) . (...) . (.) . (.)	6600K	2709

2	Watt - Driving Current / Watt - Sürüş Akımı	3				4	Reflector Angle / Reflektör Açısı	5			
		CRI / Kelvin						Product Color / Ürün Renk			
28	28W - 700mA	827	CRI>80 - 2700K	9827	CRI>98 - 2700K		ME	35° - Medium		01	white
24	24W - 600mA	830	CRI>80 - 3000K	9830	CRI>98 - 3000K					02	ral 9010
20	20W - 500mA	835	CRI>80 - 3500K	9840	CRI>98 - 4000K					03	black
15	15W - 350mA	840	CRI>80 - 4000K	MEAT	1800K					04	gray
		850	CRI>80 - 5000K	GOLD	2400K					05	dark gray
		927	CRI>90 - 2700K	FISH	6600K					06	special color
		930	CRI>90 - 3000K								
		935	CRI>90 - 3500K								
		940	CRI>90 - 4000K								

(.) / Complete Code / Komple Kod