

EMERGENCY ESCAPE LIGHTING

EXIT M

MATERIALS:

White, grey or black polycarbonate body
Transparent polycarbonate cover

MOUNTING:

Surface (wall, ceiling)
Optionally recessed** (wall, ceiling)
Optionally pendant*** (ceiling)

POWER SUPPLY:

Self contained – 220÷240VAC/50÷60Hz
Central battery –220÷240VAC/50÷60Hz; 176 - 275VDC
Central battery FZLV – 24VDC

LIGHT SOURCE:

1W, 2W, 3W LED

CHARGING:

BASIC: max. 24h
STANDARD: max. 24h
PREMIUM: max. 12h; energy-saving electronic charger

AUTONOMY AND BATTERIES:

BASIC: 1h or 3h, Ni-Cd 3,6V batteries
STANDARD: 1h or 3h, Ni-Cd 3,6V batteries
PREMIUM: 1h or 3h, LiFePO₄ 6,4V batteries

INSULATION CLASS:

II or III

IP RATING:

IP65

AMBIENT TEMPERATURE:

Self-contained:
t_a: 0°C÷40°C
t_a: -25°C ÷ 40°C – together with heater for low temperatures
CB:
t_a: 0°C ÷ 50°C

OPTIONS:


SE – non maintained
SA – maintained (with an option of connecting as non-maintained)
PT – manual test button
AT – autotest
RU – Rubic UNA central monitoring
RW – RUBIC UNA Wireless central monitoring
FZLV – central battery FZLV 24VDC
CB – central battery

ADDITIONAL INFORMATION:

LED indicator signalizes mains power supply and battery charging
Deep discharge protection
Optional adaptation of the fixture for low temperatures up to -25°C
III class of insulation of FZLV version
***requires an accessory for recessed mounting, RW option not available
***requires an accessory for pendant mounting





DIMENSIONS (mm):

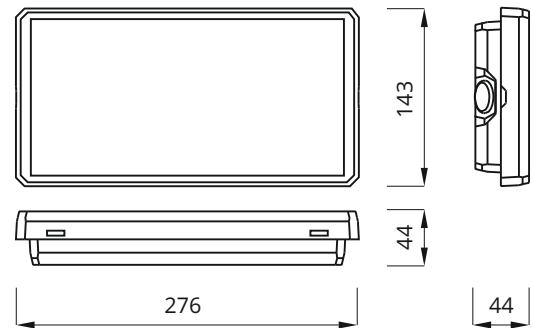

RECESSING CUT (mm):

- wall
- ceiling

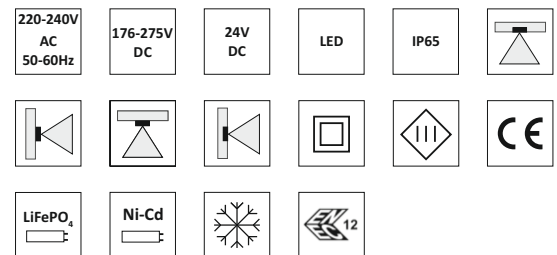

KM 618355
BS-EN 60598-2-22

EMERGENCY ESCAPE LIGHTING

SELF-CONTAINED CONFIGURATION

CODE	POWER	MODULE	AUTONOMY [h]		MODE	OPTIONS	COLOR		
BASIC									
ETE	1W	E	1	3	SE	PT X	WH	GR	BL
STANDARD									
ETE	1W	C	1	3	SA	PT X	WH	GR	BL
	2W	C	1	3	SA	PT X	WH	GR	BL
	3W	C	1	3	SA	PT X	WH	GR	BL
PREMIUM									
ETE	1W	B	1	3	SA	AT RU RW	WH	GR	BL
	2W	B	1	3	SA	AT RU RW	WH	GR	BL
	3W	B	1	3	SA	AT RU RW	WH	GR	BL

CENTRAL BATTERY CONFIGURATION - NON-ADDRESSABLE

CODE	POWER	MODULE	SYSTEM	OPTIONS	COLOR		
ETE	1W	F	CB	CBS X	WH	GR	BL
	2W	F	CB	CBS X	WH	GR	BL
	3W	F	CB	CBS X	WH	GR	BL

CENTRAL BATTERY CONFIGURATION - ADDRESSABLE

CODE	POWER	MODULE	SYSTEM	OPTIONS	COLOR		
ETE	1W	Z	CB	ADE ADP	WH	GR	BL
	2W	Z	CB	ADE ADP	WH	GR	BL
	3W	Z	CB	ADE ADP	WH	GR	BL

FZLV SYSTEM CONFIGURATION

CODE	POWER	SYSTEM	COLOR		
ETE	1W	FZLV	WH	GR	BL
	2W	FZLV	WH	GR	BL
	3W	FZLV	WH	GR	BL

OUTPUT IN EMERGENCY MODE

POWER	OUTPUT [lm]
BASIC	
1W	130
STANDARD	
1W	130
2W	250
3W	320
PREMIUM	
1W	135
2W	270
3W	350

OUTPUT IN EMERGENCY MODE

POWER	OUTPUT [lm]
1W	130
2W	270
3W	350

OUTPUT IN EMERGENCY MODE

POWER	OUTPUT [lm]
1W	130
2W	270
3W	350

OUTPUT IN EMERGENCY MODE


POWER	OUTPUT [lm]
1W	130
2W	270
3W	350

LEGEND:

- ETE – fitting EXIT M
- E – electronic gear for BASIC self-contained fittings
- C – electronic gear for STANDARD self-contained fittings
- B – electronic gear for PREMIUM self-contained fittings
- F – electronic gear for central battery fittings
- Z – electronic gear for addressable central battery fittings
- SE – non-maintained
- SA – maintained (with an option of connecting as non-maintained)
- PT – manual test button
- X – fitting without additional options
- AT – autotest
- RU – RUBIC UNA central monitoring system
- RW – RUBIC UNA Wireless central monitoring
- CB – central battery version
- CBS – central battery for circuit monitoring
- ADE – central battery with ADE address module
- ADP – central battery with ADP address module – SMART technology
- FZLV – central battery FZLV 24 VDC
- WH – white color
- GR – grey color
- BL – black color

INFORMATION FOR READERS


Photometry of EXIT M - ETE

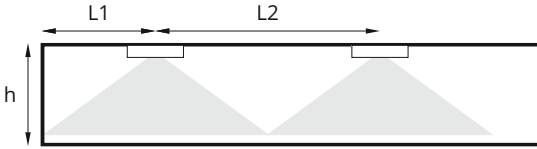

L1 - distance from the wall to the first fixture
L2 - distance between fixtures
h - height of the ceiling



ETE - LED 1W




ETE 1W (130lm) min. 1lx

h [m]	L1	L2
2,50	3,5	8,0
3,00	3,0	8,5
3,50	3,0	9,0
4,00	3,0	9,0
4,50	3,5	9,5
5,00	3,0	9,5
6,00	2,0	8,5

ETE 1W (130lm) min. 0,5lx

h [m]	L1	L2
2,50	2,5	8,5
3,00	2,5	9,0
3,50	3,0	10,0
4,00	3,0	10,5
4,50	3,0	10,5
5,00	3,0	11,0
6,00	2,5	12,0

ETE - LED 2W




ETE 2W (270lm) min. 1lx

h [m]	L1	L2
2,50	4,5	10,5
3,00	4,0	11,5
3,50	4,0	12,0
4,00	4,5	12,5
4,50	4,5	13,5
5,00	4,5	14,0
6,00	4,5	15,0
7,00	5,0	15,5
8,00	4,5	15,5
9,00	4,0	15,0
10,00	3,5	14,5

ETE 2W (270lm) min. 0,5lx

h [m]	L1	L2
2,50	4,0	10,0
3,00	4,5	12,5
3,50	4,5	11,5
4,00	4,5	12,0
4,50	4,5	12,5
5,00	4,5	13,5
6,00	4,5	13,5
7,00	4,5	14,0
8,00	4,0	13,5
9,00	3,0	13,5
10,00	2,0	13,0

ETE - LED 3W



ETE 3W (350lm) min. 1lx

h [m]	L1	L2
2,50	4,5	10,5
3,00	4,0	11,5
3,50	5,0	12,5
4,00	5,0	13,5
4,50	5,0	13,5
5,00	5,5	14,0
6,00	5,5	15,0
7,00	5,5	15,5
8,00	5,0	15,5
9,00	4,5	15,0
10,00	3,5	15,0

ETE 3W (350lm) min. 0,5lx

h [m]	L1	L2
2,50	4,0	11,0
3,00	4,0	11,5
3,50	4,5	13,0
4,00	4,5	14,0
4,50	4,5	14,5
5,00	4,5	15,5
6,00	5,0	16,5
7,00	5,5	18,0
8,00	5,5	18,5
9,00	5,0	19,5
10,00	4,5	20,5