


TUNGSRAM™

Innovation is our heritage
EST. 1896

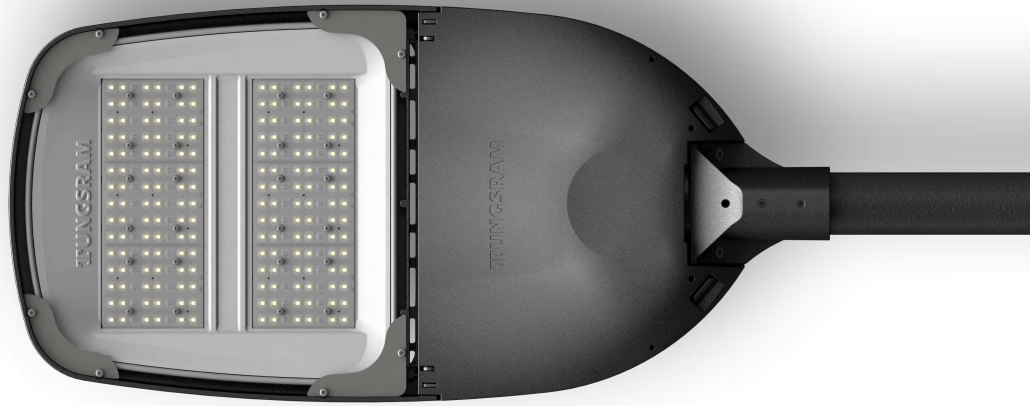

INLUMINO

Smart road lighting family

tungram.com





Only two hand-tools required for installing the fixture



Coupler can be adjusted by 5°
-15°, -10°, -5°, 0°, 5°, 10°, 15°

TOOL-LESS MAINTENANCE



Press here to open the fixture

"click and flip"
"twist and lock"



Tool-less hinged opening and lift-off head with automatic electrical disconnect



SMART READY



Smart ready luminaire with an option form NEMA socket



Airgap for optimized cooling and long lifetime

Inlumino

size L



Product information

The new Tungsram luminaire, with its innovative and unique solutions, is an excellent choice for road and street applications. The key aspects of the lamp development are the simple and fast installation, the tool-free repair options and the diverse usage. The luminaire meets the expectations of the 21st century: sleek design, and high efficiency. Inlumino is also suitable for a variety of applications, as it can be installed as a light source or easily upgraded to an IoT data point. Take advantage of the innovation from Tungsram and optimize your outdoor lighting with the new range of Inlumino luminaires.

Application areas



Roadways
and Highways



Pedestrian street

Driver features

- Electronic, dimmable driver
- Controls: Dali, DynaDim, CLO
- ThermalGuard

Structures and materials

- Housing material: die-cast aluminium body and coupler, with stainless steel screws.
- Optic material: Optical-grade polycarbonate
- Optical cover: Tempered glass
- Colour: RAL7021
- Impact Strength: IK09 (glass) / IK09 (housing) / IK08 (Shorting Cap)

Electrical

Input voltage and frequency: 220-240V, 50-60Hz
IEC protection class: Class I, Class II
Driver immunity: 10kV/5kA
Rated input power: Up to 300 W

Installation and maintenance

Mounting options:

- Side mounting coupler for 30-76mm diameters and -15°, -10°, -5°, 0°, +5°, +10°, +15° tilt options
- Post top mounting coupler for 30-76mm diameters and -15°, -10°, -5°, 0°, +5°, +10°, +15° tilt options
- Weight: 12.5 kg
- Recommended mounting height: 6-25 m
- Only two hand-tools required for installing the fixture
- Tool-less maintenance, click and flip, twist and lock
- Tool-less hinged opening and lift-off head with automatic electrical disconnect
- Storage temperature from -40°C to +85°C
- Ambient temperature from -40°C to +50°C

Optics

64 different optic combinations would be available which are suitable for pedestrian streets to high traffic roads.

Rated colour rendering index > 70

Rated correlated colour temperatures: 2700K, 3000K, 4000K, 5000K

ULOR: 0

Rated initial chromaticity co-ordinate values:

- 2700K: CIE(x=0.4582, y=0.4099) 5SDCM
- 3000K: CIE(x=0.4338, y=0.403) 5SDCM
- 4000K: CIE(x= 0.3818, y= 0.3797) 5SDCM
- 5000K: CIE(x= 0.34, y= 0.35) 5SDCM

Performance

- Rated luminous flux range: From 24.800 up to 40.900 lm
- Rated luminaire efficacy: From 130 up to 152lm/W
- Rated median useful life and the associated rated LM factor: L80B50 > 290.000 hours
- Rated useful life and the associated rated LM factor: L80B10 > 287.000 hours
- Rated median useful life and the associated rated LM factor: L90B50 > 125.000 hours
- Rated useful life and the associated rated LM factor: L90B10 > 123.000 hours
- Rated abrupt failure value: < 10% at 100.000 hours
- Photometric code: 727/559, 730/559, 740/559, 750/559
- Lumen maintenance code: 9
- Definitions and tolerances according to IEC62722-2-1:2014


Standards and regulation

CE, ENEC*, Directive 2014/30/EU, 2014/35/EU, 2009/125/EC, 1194/2012/EU, 2011/65/EC, EN 60598, EN 62471, EN 55015, EN 61000, EN 62493, EN 61547, IEC 62031


Other options available

- Extra surge protection device (10kV)
- NEMA socket with shorting cap
- Toolless removable geartray
- Fuse
- Eco version


Typical photometric features

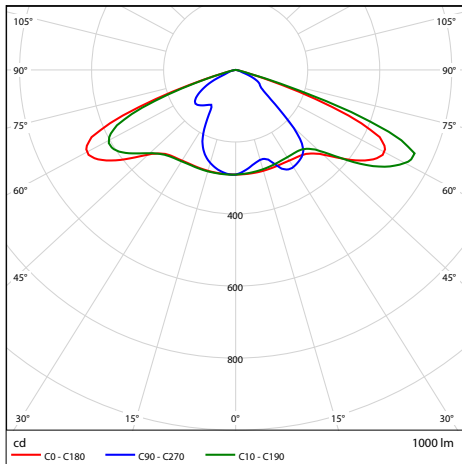


AAA

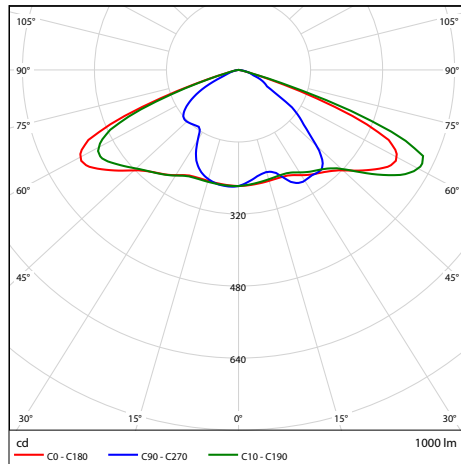


ABA

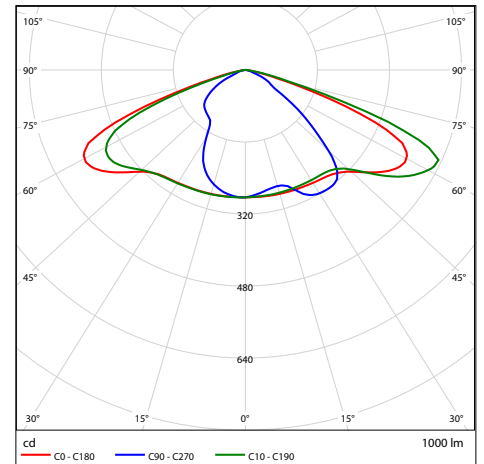


ACA

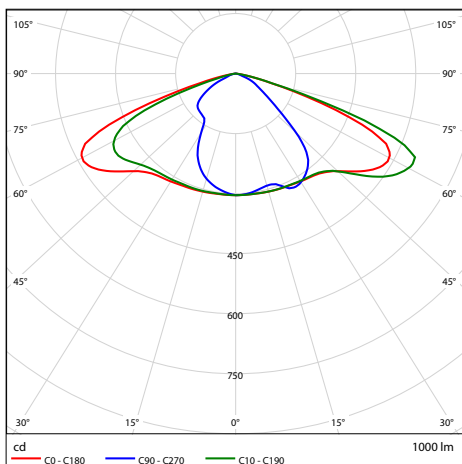


ADA

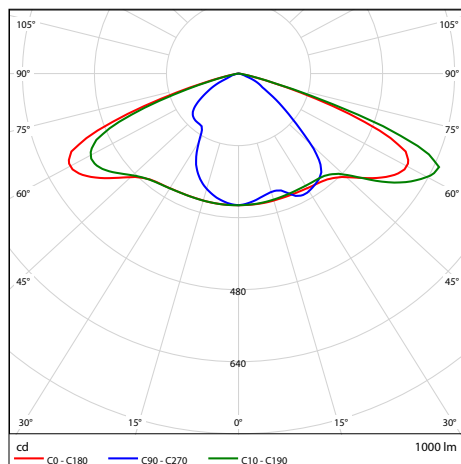


AEA

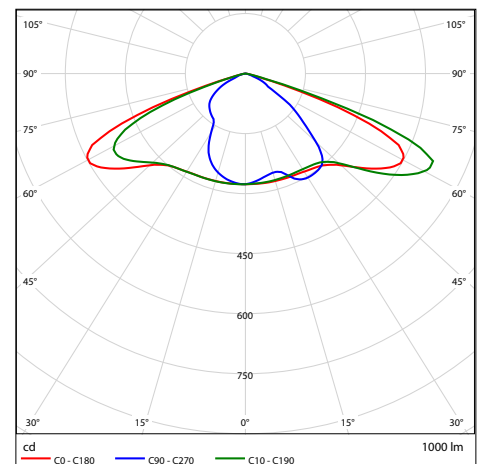


AFA

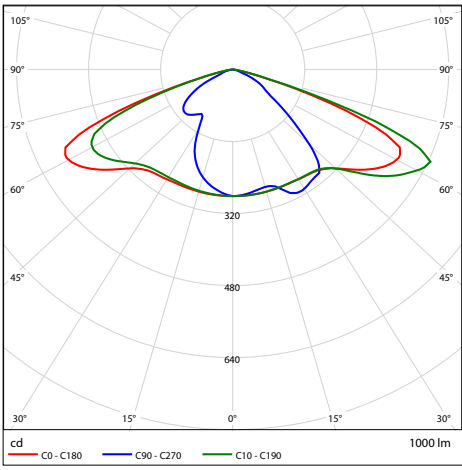


AGA

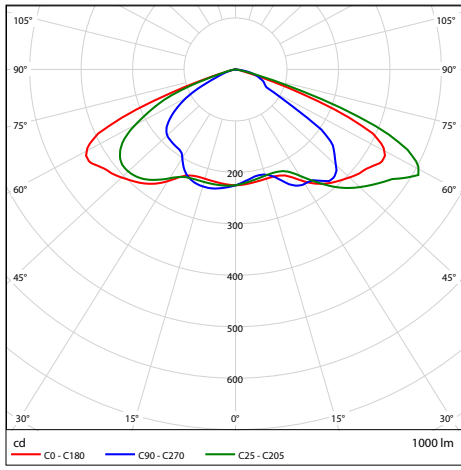


BAB

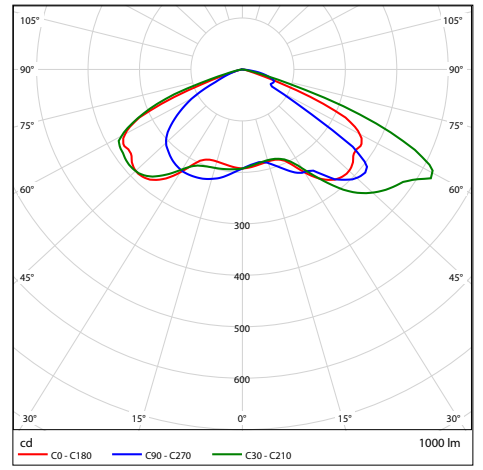


BBB

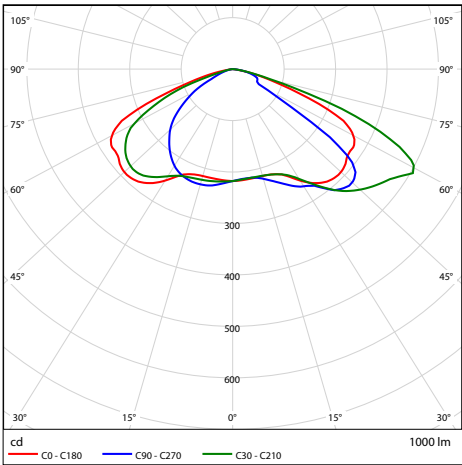


BCB

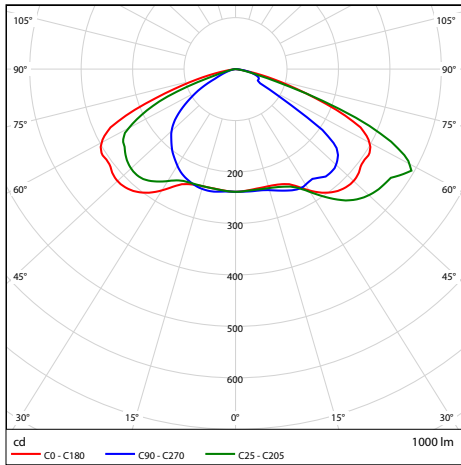


BDB

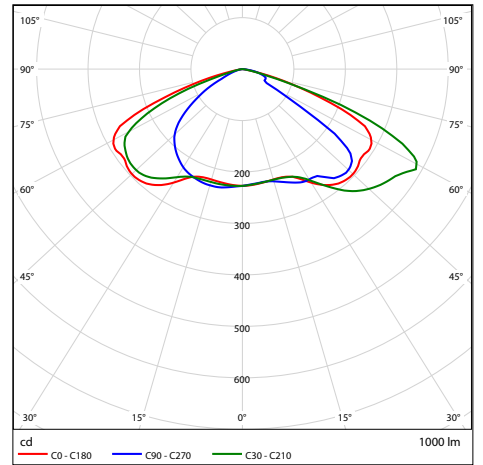


BEB

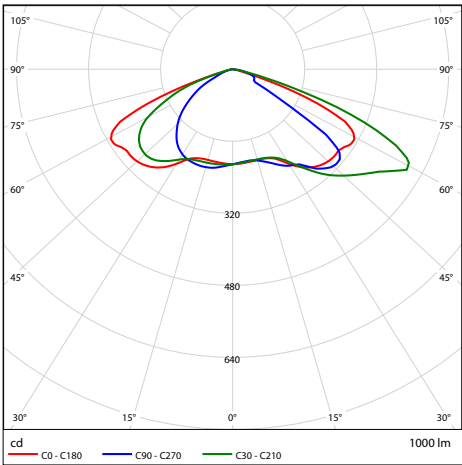


BFB

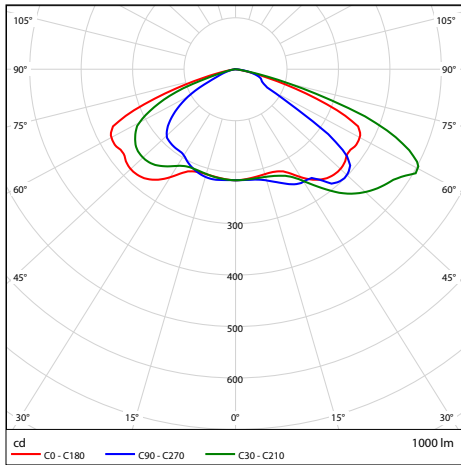


BGB

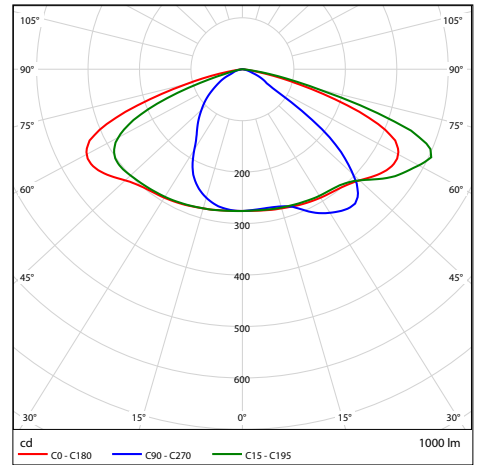


CAC

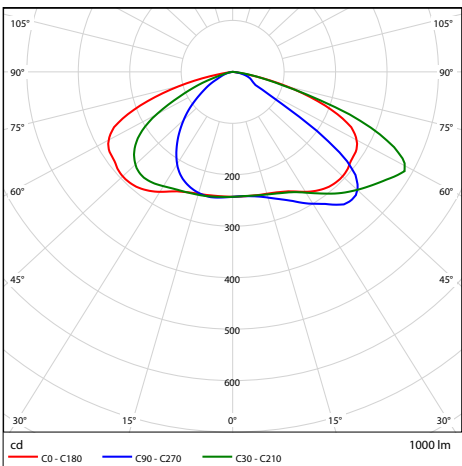


CBC

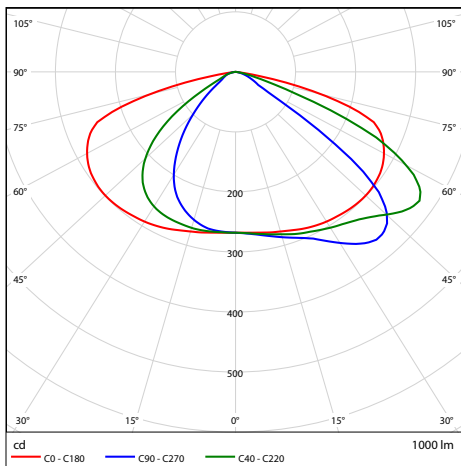


CCC

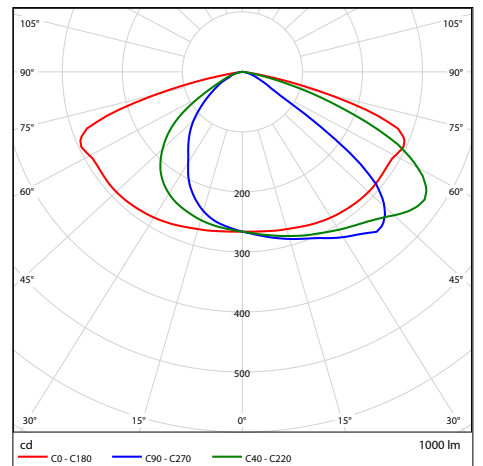


CDC

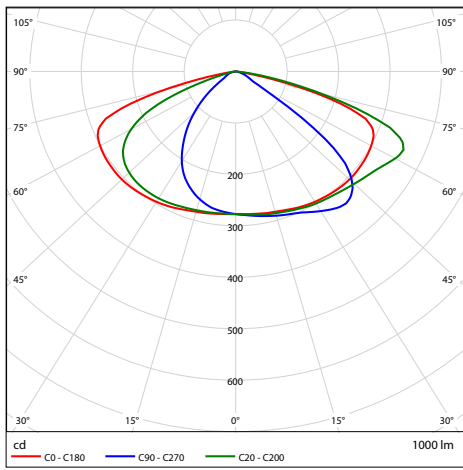


CEC

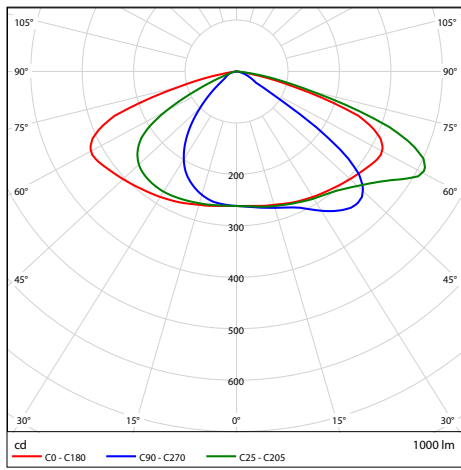


CFC

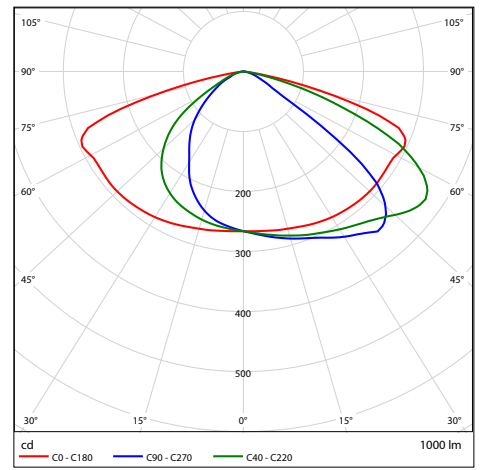


CGC

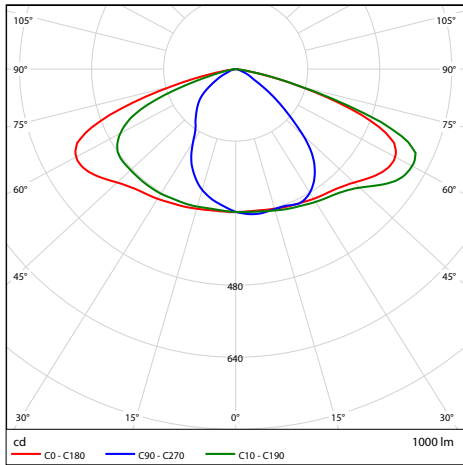


DAD

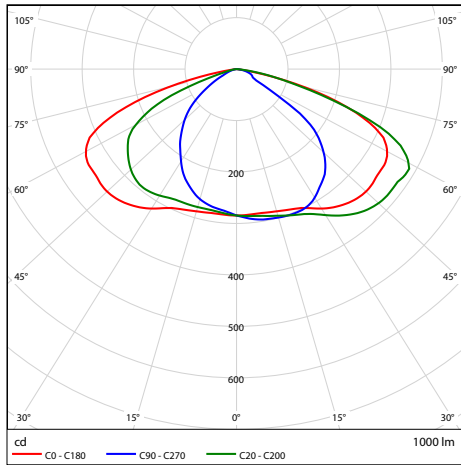


DBD

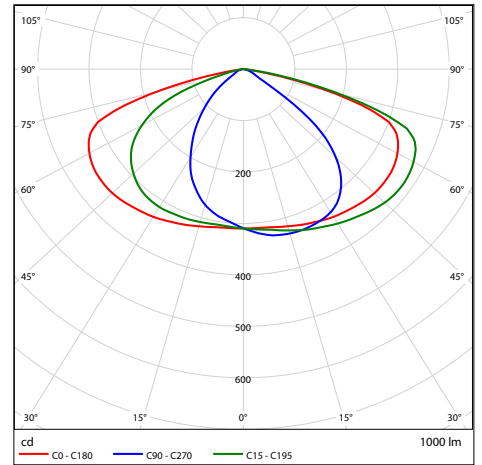


DCD

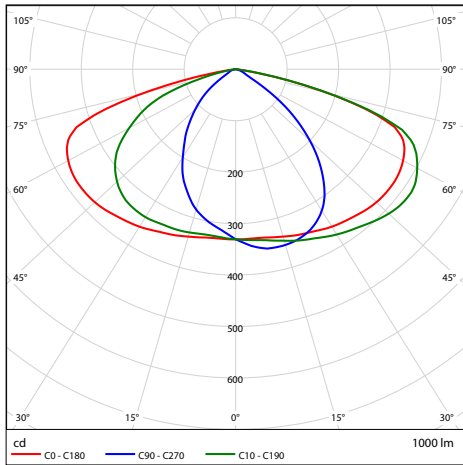


DDD

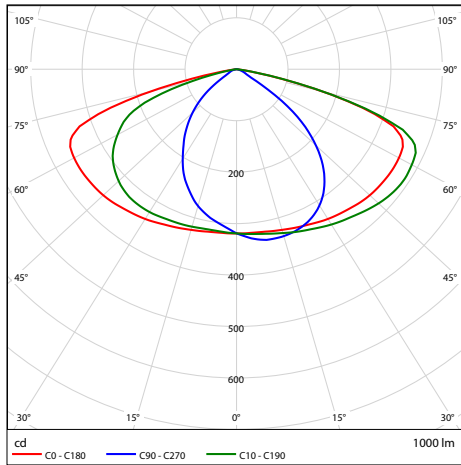


DED

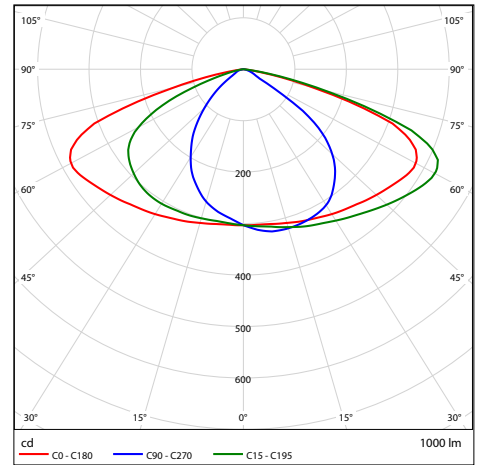


DFD

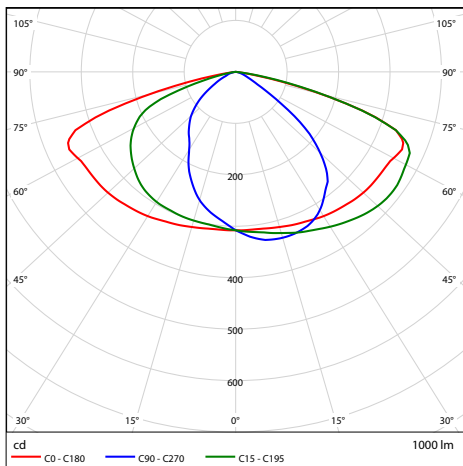


DGD

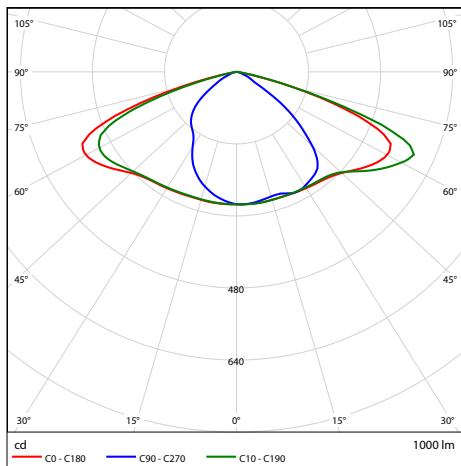


EAE

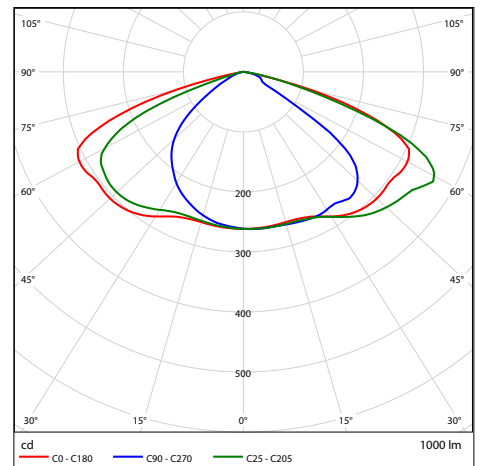


EBE

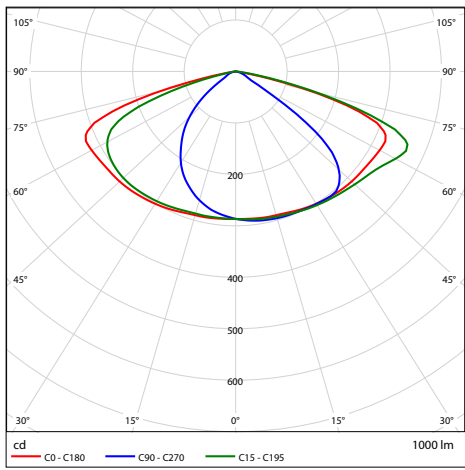


ECE

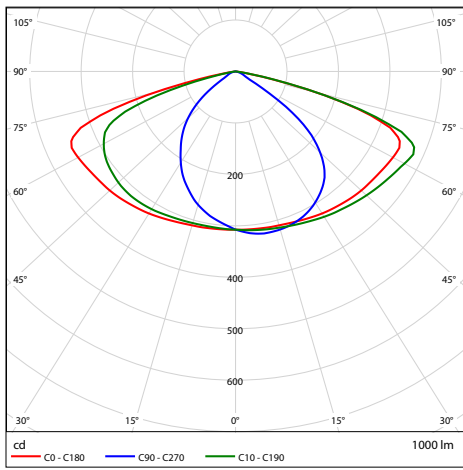


EDE

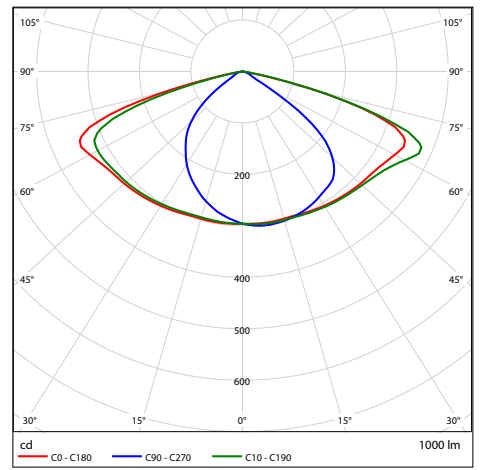


EEE

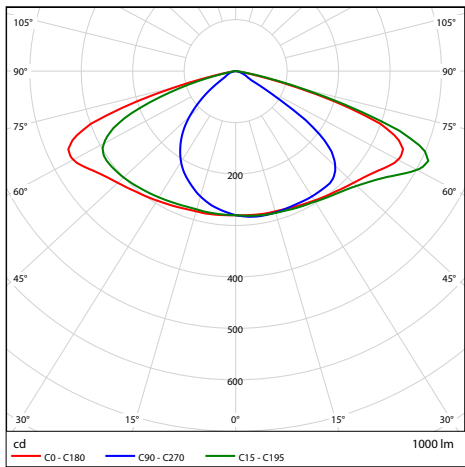


EFE

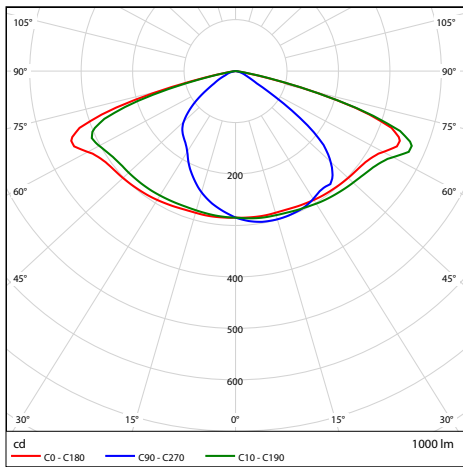


EGE

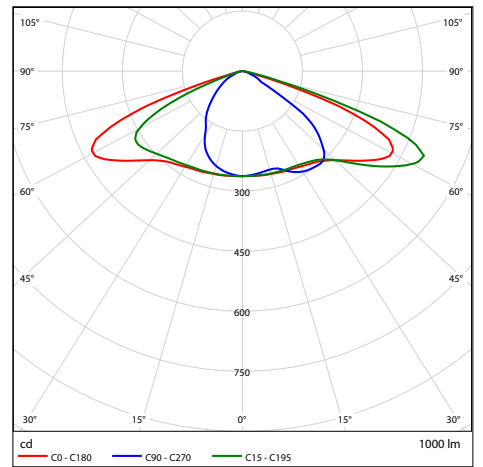


FAF

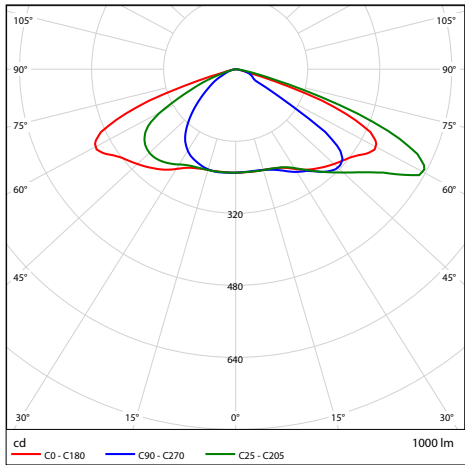


FBF

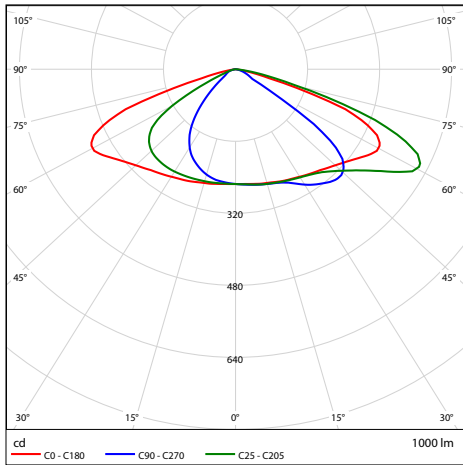


FCF

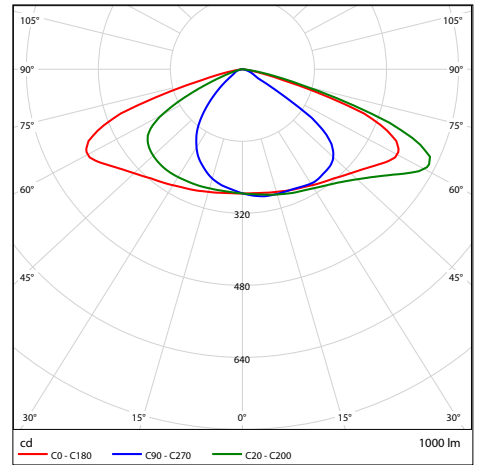


FDF

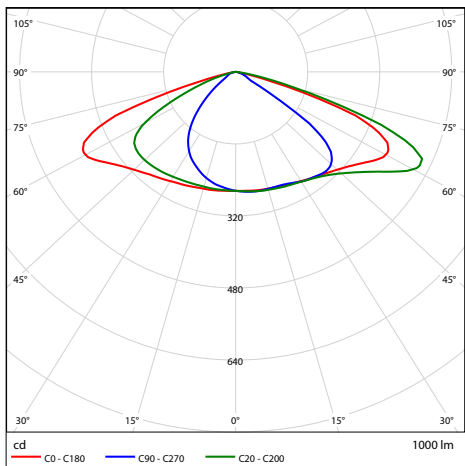


FEF

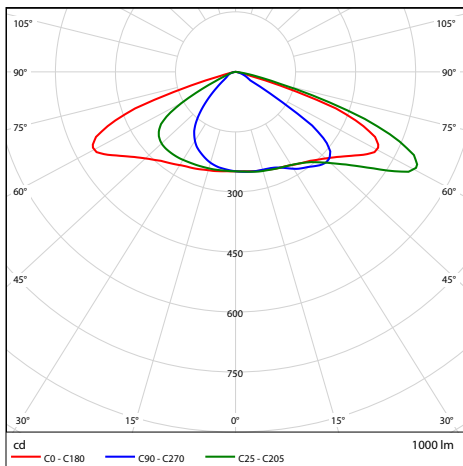


FFF

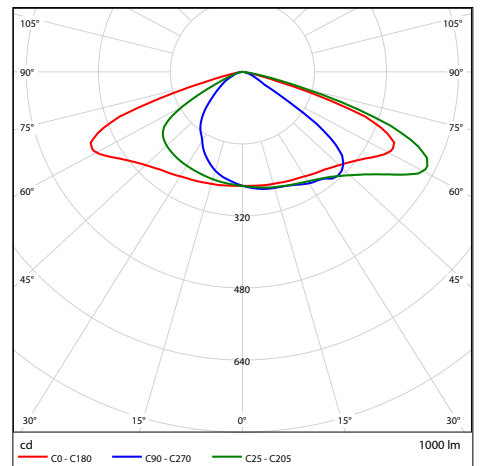


FGF

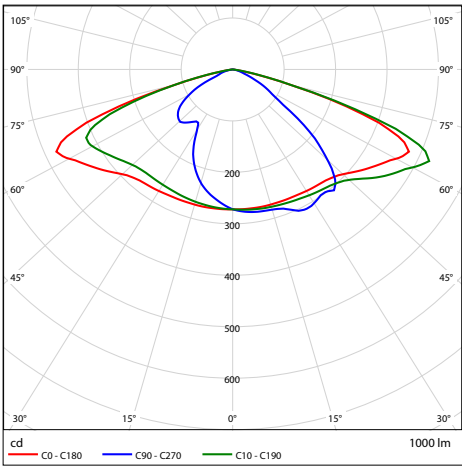


GAG

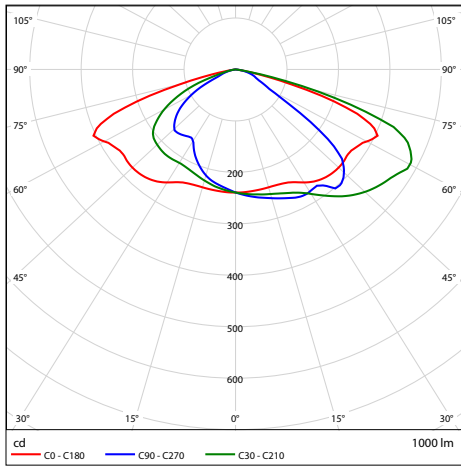


GBG

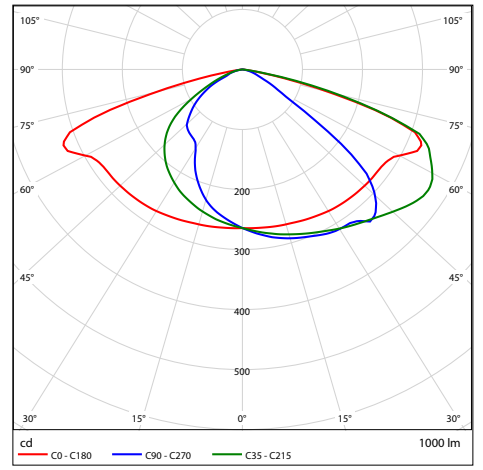


GCG

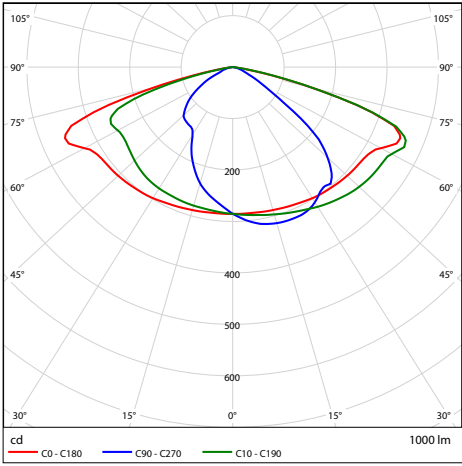


GDG

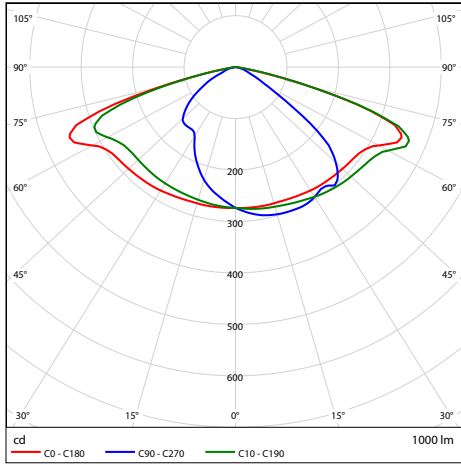


GEG

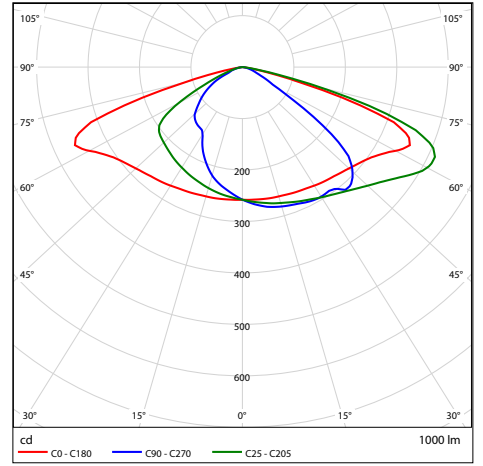


GFG

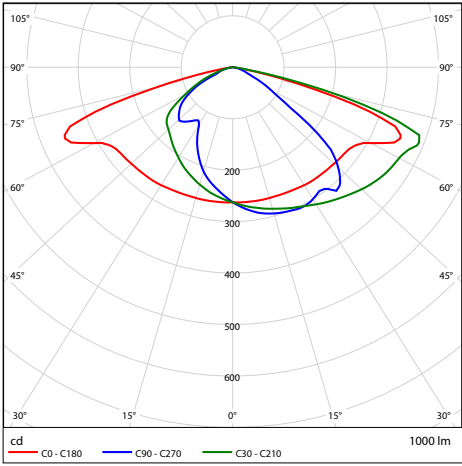


GGG

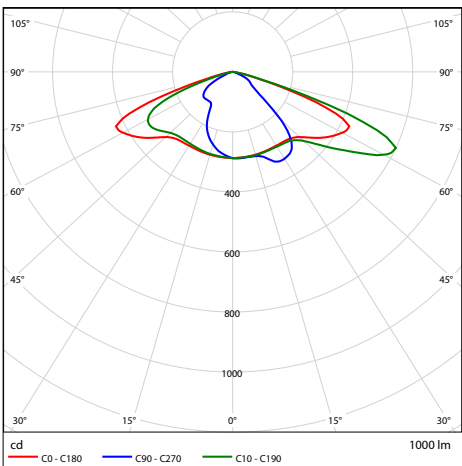


AJA

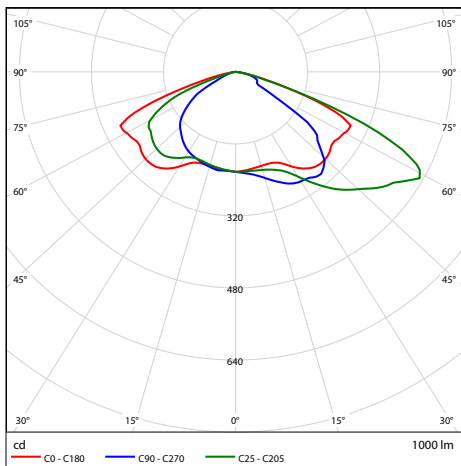


BJB

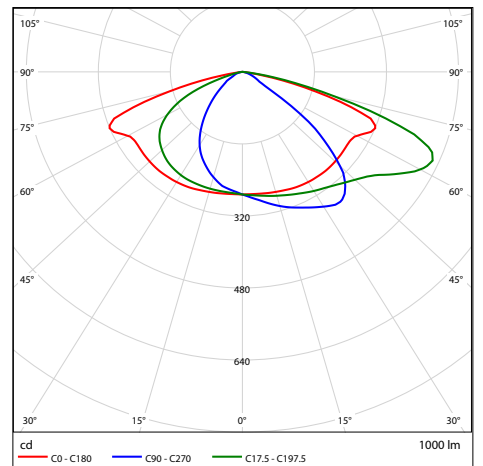


CJC

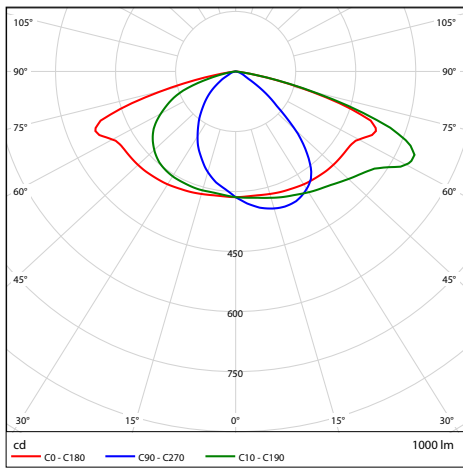


DJD

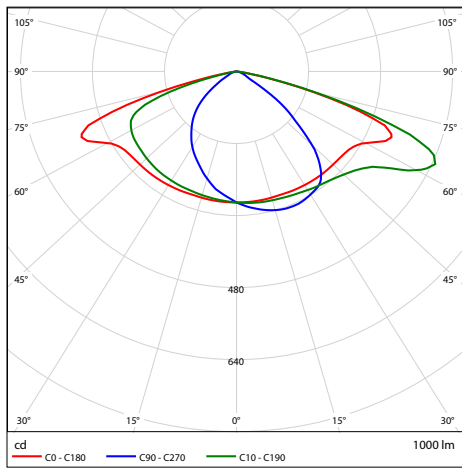


EJE

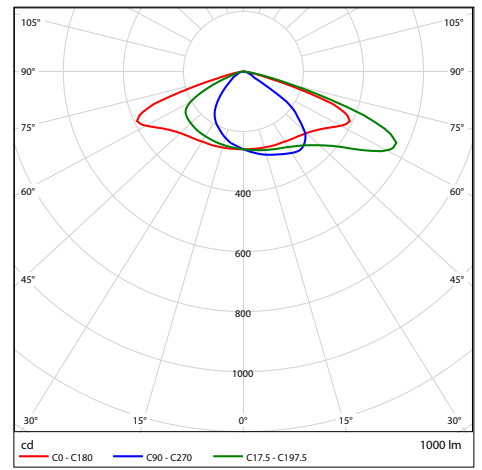


FJF

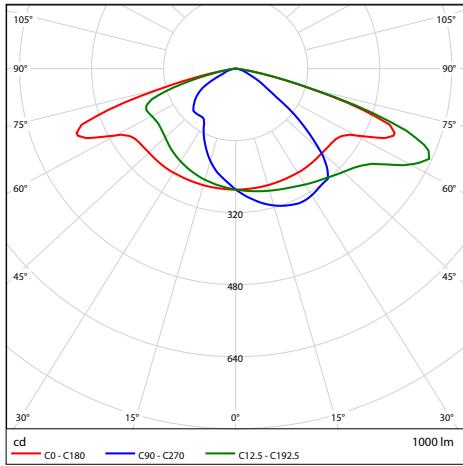


GJG

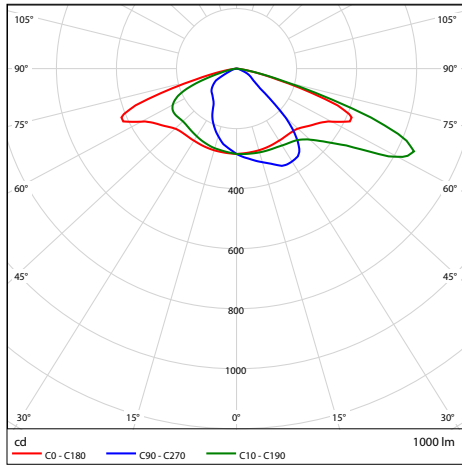


JAJ

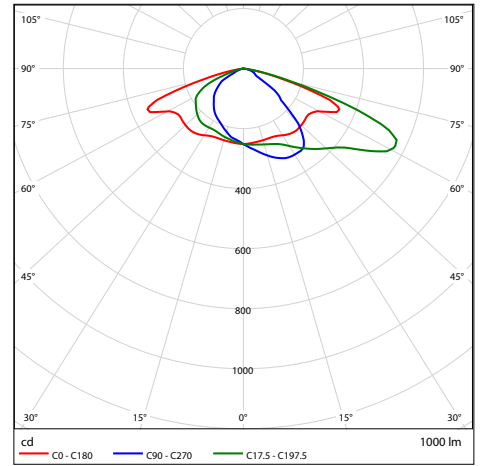


JBJ

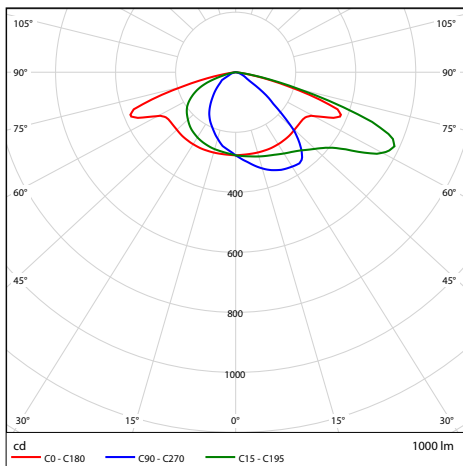


JJC

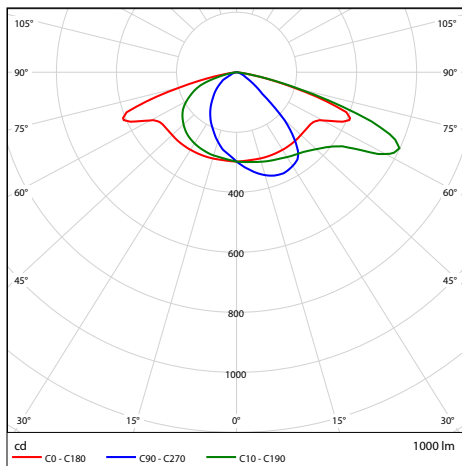


JDJ

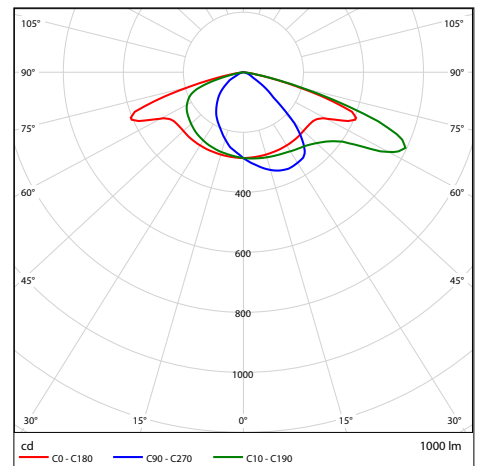


JEJ

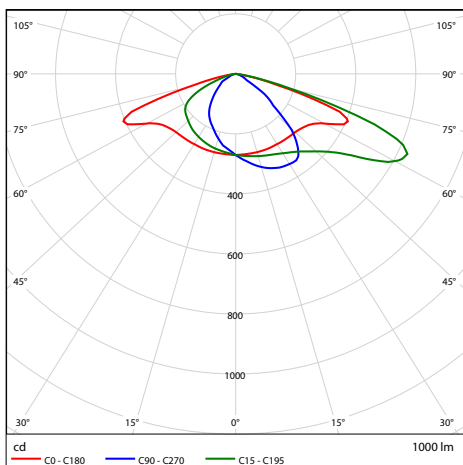

JJJ

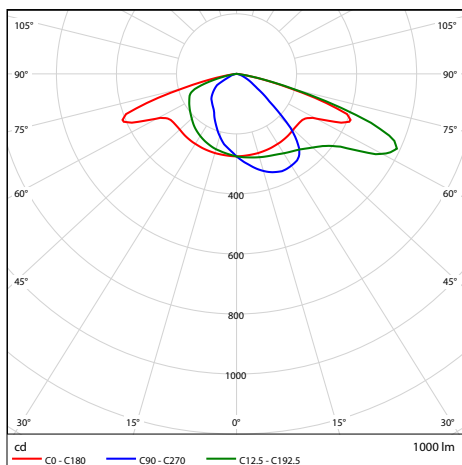


JJJ

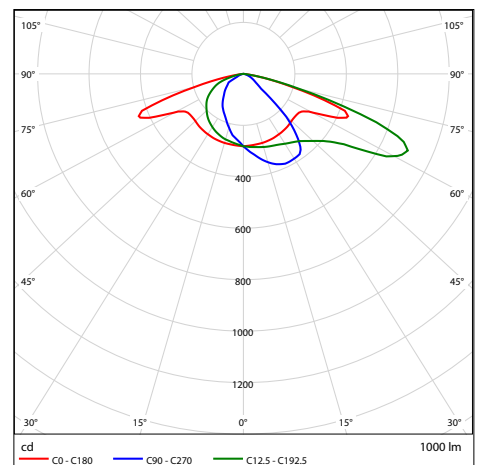

JJJ

Dimensions (mm)

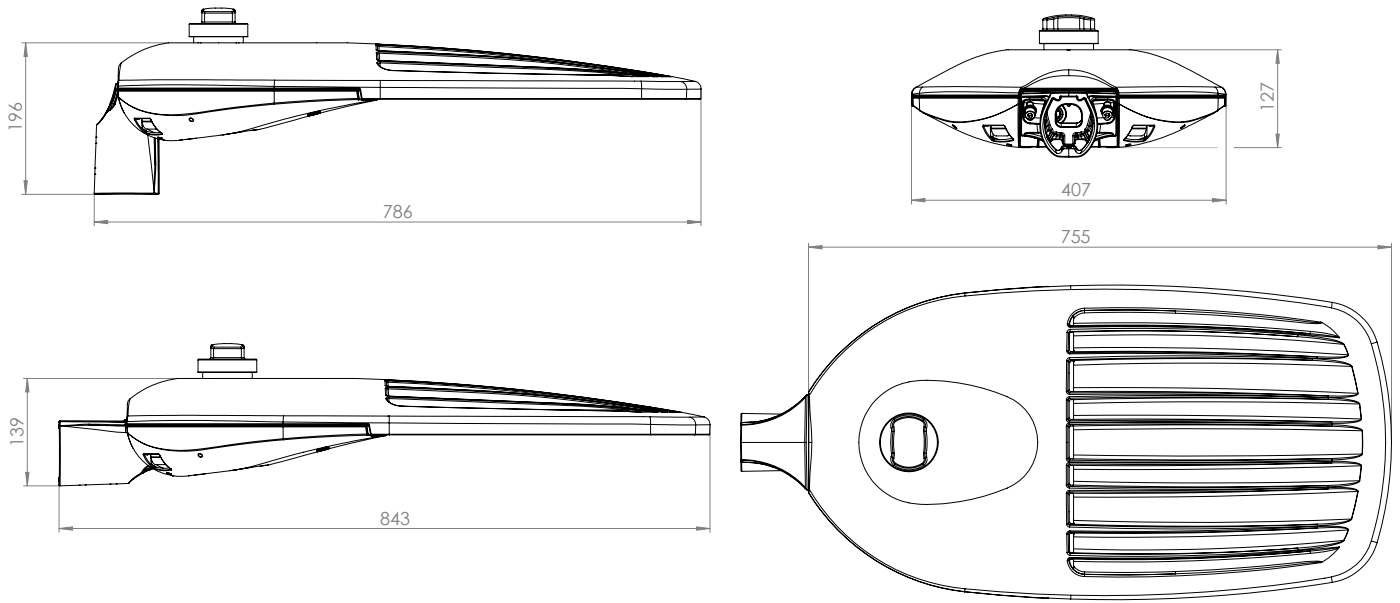

Order logic

Name	Gen.	Nominal Lumen (lm)*****	Optics*	CCT (K)	Option list	Accessories	Control	IEC Protection Classes	Precabbling	Mounting	Color
INL	1	25000	AAA	727 - 2700K 70 CRI	S ^[1] N ^[2] *** E ^[3] ****	NO - No Accessory	N - No control	C1 - Class I C2 - Class II	N - No precabbling Pxx - Precabbling with XX meters**	U48 - Universal 30-48mm U60 - Universal 42-60mm U76 - Universal 60-76mm	R7021 Rxxxx
		27500	BBB	730 - 3000K 70 CRI		FU - Fuse	D - DALI external				
		30000	CCC	740 - 4000K 70 CRI		SP - Extra surge protection	Yxx - Dynadim**				
		32500	DDD	750 - 5000K 70 CRI		FS - Fuse + extra surge protection	NLxx - No control+ CLO**				
		35000	EEE				DLxx - DALI+CLO**				
		37500	FFF				YLxx - Dynadim+ CLO**				
		40000	GGG								
			JJJ								

Example: INL1-40000AAA740-NSPD-C1NU60-R7021

* all symmetric optic combinations are valid eg. ABA, but ABC is not

** x is integer number 0-9

*** N from option list is only available with SP or FS from accessories

**** E from option list is only available with the NO from accessories

***** Lumen output of the Luminaire can be programmed by the manufacturer in 100lm steps within the marked range. For valid combinations see below table

^[1] Standard option. This version comes with the toolless opening feature, the toollessly replaceable geartray.

All accessory combinations are valid with this option.

^[2] NEMA socket option. This version comes with the toolless opening feature and the toollessly replaceable geartray and shorting cap. From the accessories list SP or FS can only be selected to protect your smart devices

^[3] Eco version. This version comes with a precable and can not be opened. Parts are non-user replaceable. All accessory combinations are invalid for this option.

Nominal lumens table

2700K			3000K			4000K			5000K		
Lm	W	LPW	Lm	W	LPW	Lm	W	LPW	Lm	W	LPW
25000	196	128	25000	181	139	25000	170	147	25000	168	149
27500	221	125	27500	203	136	27500	192	144	27500	190	145
30000	248	122	30000	225	133	30000	214	141	30000	212	142
32500	261	125	32500	249	131	32500	236	138	32500	234	140
35000	286	123	35000	264	133	35000	259	136	35000	254	138
37500	-	-	37500	286	131	37500	270	139	37500	267	141
40000	-	-	40000	-	-	40000	292	137	40000	289	139

