


Mira 65 | 5 W | medium 30° | Floor recessed

Technical Specifications

| | |
|-------------------------------------|--|
| Source lamp | LED 5 W |
| Total wattage | 5 |
| Voltage | 220-240 Vac - 50/60 Hz |
| Control | On/Off • dimmable on request |
| Luminous flux (*Source flux) | 294 lm (400 lm*) @ 3000 K |
| Luminous efficacy | 59 lm/W @ 3000 K |
| McADAM steps | 3 |
| Beam | medium 30° |
| CRI | >80 |
| Life time | L 70 > 50.000 h Ta 25°C L 70 > 50.000 h Ta 40°C |
| IP rating | 67 |
| IK rating | 8 |
| Insulation class | II |

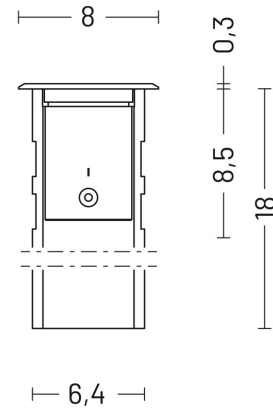


Materials

| | |
|------------------|---------------------------------|
| Body | Extruded aluminium EN AW6060 |
| Diffuser | Extra clear tempered glass 8 mm |
| Finishing | Inox - Anodized |

E (lux)

| H (m) | lux (3000 K) | Ø (m) |
|-------|--------------|-------|
| 1.00 | 524 | 0.6 |
| 2.00 | 131 | 1.2 |
| 3.00 | 58 | 1.8 |
| 4.00 | 33 | 2.4 |
| 5.00 | 21 | 3 |

Photometry

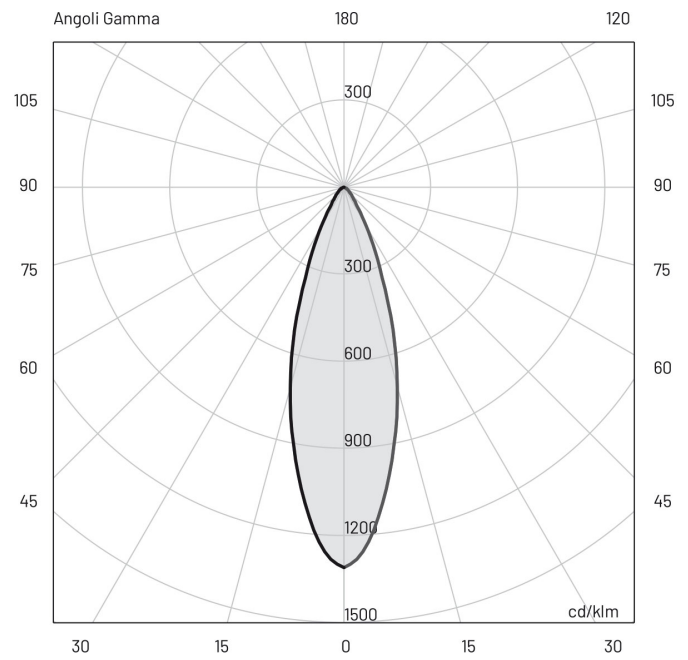

Included accessories

- 1 m length cable H05RN-F
- Housing box

Available accessories

0404M009

Single connection IP68