





5 / Product Color / Ürün Renk



Technical Drawing / Teknik Çizim

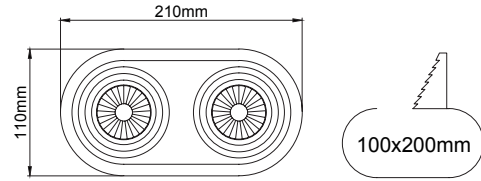

4 / Reflector Angle / Reflektör Açısı

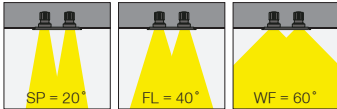

EN

- Die-cast aluminium body.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design with passive heat dissipation.
- 15° rotation on vertical and 15° angle on horizontal axis with mechanical aiming lock.
- Clear safety glass.
- Classic dimming systems of DALI, 1-10V and Phase-Cut Dim options.
- High tech control systems of Tuneable White, Warm Dim and Wireless Dim options.
- Basic colours: White, Black, Gray, Dark Gray, RAL9010 and special color options.
- Available accessories are Honeycomb Filter and Colour Filter.
- Spot, Flood and Wide Flood beam angle options available with rotationally symmetric light distribution.
- Standart CRI>80, high CRI>90 and super high CRI>98 LED options available.
- Up to 92lm/W efficiency.
- High colour consistency: <3 SDCM
- Emergency kit system can be integrated.

TR

- Alüminyum enjeksiyon gövde.
- 220-240V / 50-60Hz enerji giriřli.
- Pasif soğutma teknolojisine sahip akıllı soğutma tasarımı.
- Dikeyde 15°, yatayda 15° hareket kabiliyetine sahip mekanik kilitlemeli mafsal sistemi.
- Tamperli cam.
- Klasik DALI, 1-10V ve Faz DIM seçenekleri uygulanabilir.
- Yüksek teknoloji kontrol sistemleri olan Kablosuz DIM, Sıcak DIM ve Dinamik Beyaz uygulamaları yapılabilir.
- Standart renk seçenekleri: Beyaz, Siyah, Gri, Koyu Gri, RAL9010 yanında isteğe bağılı özel renk seçenekleri uygulanabilir.
- Balpeteđi Filtresi ve Renk Filtresi aksesuar seçenekleri uygulanabilir.
- Dar, Geniş ve Çok Geniş reflektör açısı seçenekleri mevcuttur.
- Standart CRI>80, yüksek CRI>90 ve ekstra yüksek CRI>98 LED seçenekleri mevcuttur.
- 92lm/W'a varan verim.
- Yüksek renk uyumu: <3 SDCM
- Acil aydınlatma kit sistemi uygulanabilir.

Minilux / I01.MLR.17078



* Code example / Kod örneği:

I01.MLR.17078 . 15 . 827 . SP . 01

- 1- Product code / Armatür kodu
- 2- Power / Güç
- 3- CRI / Kelvin
- 4- Reflector angle / Reflektör açısı
- 5- Colour / Ürün renk

Power / Güç	CRI	Order Code / Sipariş Kodu	Kelvin	Lümen T _c =50° Lümen
2x15W	CRI>80	I01.MLR.17078 . (.) . (...) . (.) . (..)	2700K	2500
			3000K	2562
			3500K	2652
			4000K	2744
			5000K	2936
	CRI>90	I01.MLR.17078 . (.) . (...) . (.) . (..)	2700K	2250
			3000K	2304
			3500K	2386
			4000K	2468
			5000K	X
	CRI>98	I01.MLR.17078 . (.) . (...) . (.) . (..)	2700K	1726
			3000K	1790
			4000K	1878
	Meat / Et COB	I01.MLR.17078 . (.) . (...) . (.) . (..)	1800K	X
	Food / Gıda COB	I01.MLR.17078 . (.) . (...) . (.) . (..)	2400K	X
	FISH / Balık COB	I01.MLR.17078 . (.) . (...) . (.) . (..)	6600K	X

2	Watt - Driving Current / Watt - Sürüş Akımı	3		4		5			
		CRI / Kelvin		Reflector Angle / Reflektör Açısı		Product Color / Ürün Renk			
15	2x15W - 350mA	827	CRI>80 - 2700K	9827	CRI>98 - 2700K	SP	2x20° - Spot	01	white
10	2x10W - 250mA	830	CRI>80 - 3000K	9830	CRI>98 - 3000K	FL	2x40° - Flood	02	ral 9010
7	2x7W - 180mA	835	CRI>80 - 3500K	9840	CRI>98 - 4000K	WF	2x60° - Wide Flood	03	black
4	2x4W - 100mA	840	CRI>80 - 4000K					04	gray
		850	CRI>80 - 5000K					05	dark gray
		927	CRI>90 - 2700K					06	special color
		930	CRI>90 - 3000K						
		935	CRI>90 - 3500K						
		940	CRI>90 - 4000K						