
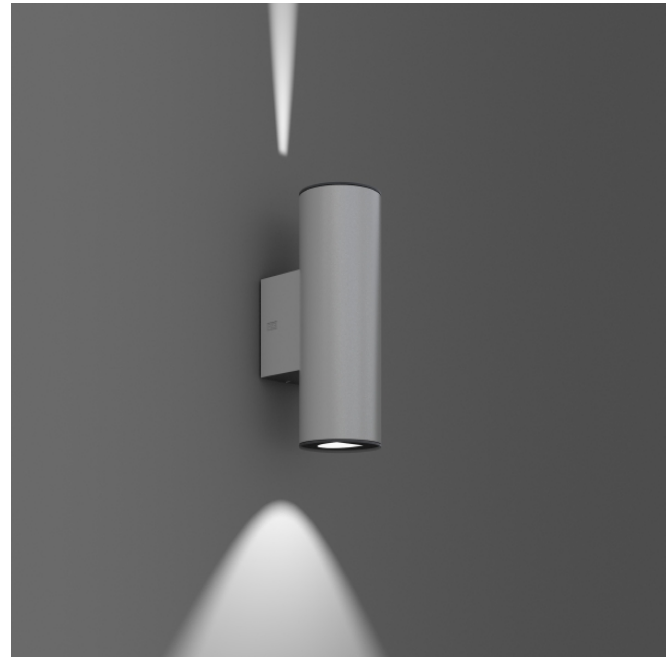



Cyl

582020.004 | Wall luminaires

Wall luminaires
4051859228035
LED
L 100, B 154, H 307



Wallscaping: elegant and innovative wall luminaire for accent lighting. Housing made of corrosion-resistant die-cast aluminium, seawater resistant powder-coated. With membrane valve as a standard to avoid condensed water. Cover made of ceramic-coated toughened glass with bayonet lock. With mains voltage LED module. Light emission upwards and downwards, spotlight/flood. Fixing on the wall outside the gasketed volume, drill hole deviations can be compensated. Screwless luminaire fixing via RZB Gravolock® System. Electrical plug and play featuring quick connector. Cable entry granting two cables for loop-through.

Colour

Colour silver metallic

Dimensions

Length L 100 mm
Width B 154 mm
Height H 307 mm
Weight 2,41 kg

Lamp

Lamp 1 LED
Colour temperature lamp 1 3000K
Colour rendering index (CRI) 1 80
Colour consistency (McAdam) 1 3
Photobiological safety according to EN 62471 Risk group 2

Lighting technology

Colour temperature 3.000 K
Rated luminous flux 190 lm
Glare evaluation UGR (4H 8H) 1 20,3
Beam angle 37° / 36° / 27° / 36°

Electrical

Control gear	Converter not necessary
Control gear 2	Converter
Voltage	220 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	31
Luminaires on B16A fuse	50
Luminaires on C10A fuse	52
Luminaires on C16A fuse	85
Inrush current / inrush current duration	20 A / 170 µs
Ripple current / Flicker	3 %
System power	7,5 W
Luminaire efficacy	26 lm/W
Power factor	0,6

Approbations

Type of Protection	IP 65
Protection Class	I
Glow Wire Test	960°C - 30 seconds
Impact Protection	IK03 (0,35 Joule)
Safety marks	F-mark
Ambient temperature min.	-25 °C
Ambient temperature max.	35 °C
ULOR	19 %
Trade mark	CE
CIE Flux Code / CEN Flux Code	90 97 98 81 100
Energy efficiency class LED	A+
Energy class of included lamp	A++