



Linear system

75.1044.04 | LED linear systems

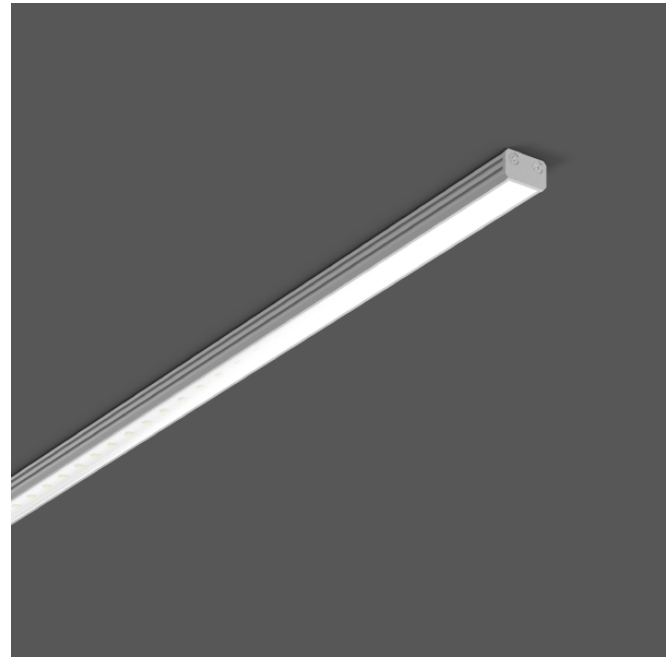

LED profile strip lights
4051859228721
LED
L 603, B 18, H 10



LED profile light strip with high protection type. Housing: extruded aluminium profile, anodised. End cap without groove. Fastening: M4 stainless steel nuts and two magnetic holders. IP 67 resin coated LED element with opaque resin coating. 1.5 m connection cable, double insulated, with open ends. Exit from behind via groove to the side, end cap without groove. Modular design: driver for LED profiles to be ordered separately. We can offer special project solutions according to customers` specifications. The profiles can be manufactured in different lengths, other light colours, with different controls such as DMX, DALI a.s.o. Please do not hesitate to contact us for information and individual planning advice. Swivelling mounting bracket made of aluminium for ceiling and wall installation available as accessory.

Colour

Colour aluminium , anodised

Dimensions

Length L 603 mm
Width B 18 mm
Height H 10 mm
Weight 234 g

Lamp

Lamp LED
Colour temperature 4000K
Colour rendering index (CRI) 80
Rated life 40000 h (L80/B10)
Photobiological safety according to EN 62471 Risk group 1

Lighting technology

Colour temperature 4.000 K
Rated luminous flux 700 lm
Glare evaluation UGR (4H 8H) 1 27
Beam angle 113° / 116°

Electrical

Control gear	Converter required.
Voltage	24 V / 0 Hz
System power	10 W
Luminaire efficacy	70 lm/W

Approbations

Type of protection	IP 67
Note: Type of Protection	IP 67 / ballasts IP20
Protection class	III
Filament test	650°C - 30 seconds
Impact resistance	IK02 (0,20 Joule)
Safety marks	F-mark
ULOR	0
Conformity mark	CE, EAC
CIE Flux Code / CEN Flux Code	47 79 96 100 100

Accessories

982233.002	Driver 24 V, IP 20 L 188, B 30, H 21 max. 33 W, on/off
75.1034.00	Pivoting element for LED profile L 63, B 18, H 40
982233.002.76	Driver 24 V, IP 20 L 188, B 30, H 21 max. 33 W, TouchDim, DALI