
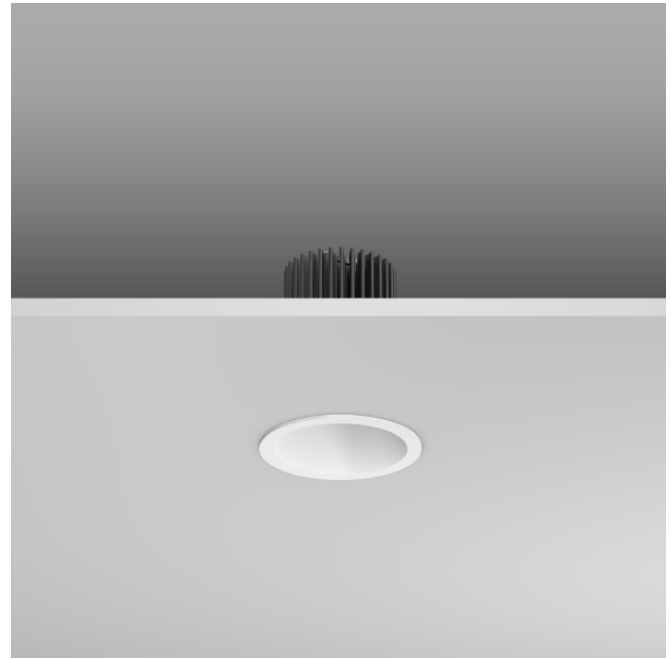



Levido Round

901596.002.1 | Recessed downlights

Recessed downlights
4051859156925
LED
D 91, H 2, HEL 122



Decorative LED downlight with daintily small dimensions Die-cast aluminium cover, powder-coated. Extruded aluminium heat sink. Reflector: aluminium, highly polished anodised finish. With safety glass. Ceiling installation with spring system. Incl. separate LED converter with connecting cable 250 mm. Opal PMMA plastic cover included as accessory.

Colour

Colour white

Dimensions

Diameter D 91 mm
Height H 2 mm
Cut-out diameter DA 78 mm
Recess height HE 125 mm
Luminaire: recess height HEL 122 mm
Ceiling thickness S 1-20 mm
Dimensions L 107 x B 36 x H 25 mm
Weight 300 g

Lamp

Lamp 1 LED
Colour temperature lamp 1 4000K
Colour rendering index (CRI) 1 80
Colour consistency (McAdam) 1 4
Lifetime of lamp 1 combined 50000 h (L70/B10)
Photobiological safety according to EN 62471 Risk group 1

Lighting technology

Colour temperature 4.000 K
Rated luminous flux 940 lm
Glare evaluation UGR (4H 8H) 1 19,7
Beam angle 39°

Electrical

Control gear Converter
Voltage 220 - 240 V / 50 - 60 Hz
System power 13 W
Luminaire efficacy 73 lm/W
Power factor 0,9

Approbations

Type of Protection IP 20, IP 44
Protection Class II
Glow Wire Test 850°C - 30 seconds
Impact Protection IK06 (1 Joule)
Safety marks Einbauleuchte nicht bedecken!, F-mark
ULOR 0
Trade mark CE, EAC
CIE Flux Code / CEN Flux Code 90 96 99 100 100
Energy efficiency class LED A+
Energy class of included lamp A+