






5 / Product Color / Ürün Renk

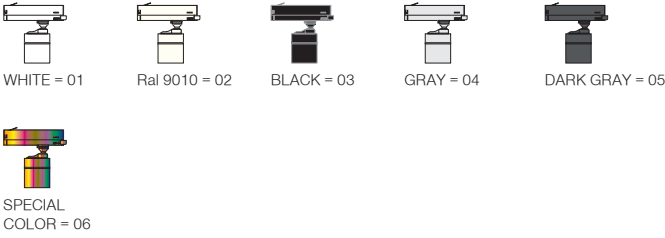

Technical Drawing / Teknik Çizim

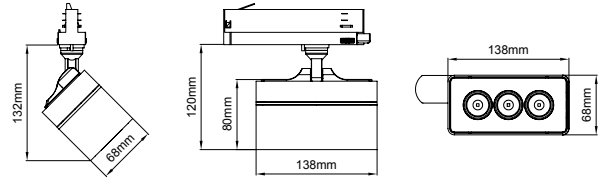

4 / Reflector Angle / Reflektör Açısı



* See page 321 for ldt files. / Işık eğrileri için sayfa 321 bakınız.

EN

- Die-cast aluminium body.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design with passive heat dissipation.
- With 3-phase universal in-track adaptor.
- 90° rotation on vertical and 350° angle on horizontal axis with mechanical aiming lock.
- Individual lenses with uniform light effect.
- Classic dimming system of DALI Dim option.
- High tech control system Wireless Dim option.
- Basic colours: White, Black, Gray, Dark Gray, RAL9010 and special color options.
- Available accesories are Honeycomb Filter, Visor, Barn Door, Linear Spread diffuser and Softening diffuser.
- Spot, Medium and Wide Flood beam angle options available with rotationally symmetric light distribution.
- Standart CRI>80 and high CRI>90 LED options available.
- Up to 93lm/W efficiency.
- High colour consistency: <3 SDCM

TR

- Alüminyum enjeksiyon gövde.
- 220-240V / 50-60Hz enerji giriřli.
- Pasif soğutma teknolojisine sahip akıllı soğutma tasarımı.
- 3-Fazlı üniversal ray adaptörlü.
- Dikeyde 90°, yatayda 350° hareket kabiliyetine sahip mekanik kilitlemeli mafsalsistemi.
- Homojen ışık çıkışı sağlayan tekli lens yapısı.
- Klasik DALI DIM seçeneđi uygulanabilir.
- Yüksek teknoloji kontrol sistemi olan Kablosuz DIM uygulaması yapılabilir.
- Standart renk seçenekleri: Beyaz, Siyah, Gri, Koyu Gri, RAL9010 yanında isteđe bađlı özel renk seçenekleri uygulanabilir.
- Balpeteđi Filtresi, Vizör, Kamařma önleyici flap, Işık yayıcı diffüzör ve Işık yumuřatıcı diffüzör aksesuar seçenekleri uygulanabilir.
- Dar, Orta ve Çok Geniř reflektör açısı seçenekleri mevcuttur.
- Standart CRI>80 ve yüksek CRI>90 LED seçenekleri mevcuttur.
- 93lm/W'a varan verim.
- Yüksek renk uyumu: <3 SDCM

Cosmos / I01.MLT.26410



* Code example / Kod örneği:

I01.MLT.26410 . 12 . 827 . SP . 01
 1 2 3 4 5

- 1- Product code / Armatür kodu
- 2- Power / Güç
- 3- CRI / Kelvin
- 4- Reflector angle / Reflektör açısı
- 5- Colour / Ürün renk

Power / Güç	CRI	Order Code / Sipariş Kodu	Kelvin	Lümen T _c =50° Lümen
12W	CRI>80	I01.MLT.26410 . (.) . (..) . (.) . (..)	2700K	1042
			3000K	1074
			3500K	1096
			4000K	1118
			5000K	1152
	CRI>90	I01.MLT.26410 . (.) . (..) . (.) . (..)	2700K	926
			3000K	955
			3500K	974
			4000K	994
			5000K	X
	CRI>98	I01.MLT.26410 . (.) . (..) . (.) . (..)	2700K	X
			3000K	X
			4000K	X
	Meat / Et COB	I01.MLT.26410 . (.) . (..) . (.) . (..)	1800K	X
	Food / Gıda COB	I01.MLT.26410 . (.) . (..) . (.) . (..)	2400K	X
	FISH / Balık COB	I01.MLT.26410 . (.) . (..) . (.) . (..)	6600K	X

2	Watt - Driving Current / Watt - Sürüş Akımı		3	CRI / Kelvin		4	Reflector Angle / Reflektör Açısı		5	Product Color / Ürün Renk																										
	Watt	Driving Current		CRI	Kelvin		Reflector Angle	Product Color		Product Color	Product Color																									
12	12W	500mA	827	CRI>80	2700K	SP	15° - Spot	01	white	02	ral 9010																									
		350mA										835	CRI>80	3500K	WF	50° - Wide Flood	03	black																		
		200mA																	840	CRI>80	4000K	04	gray													
8	8W	350mA	830	CRI>80	3000K	ME	34° - Medium	05	dark gray	06	special color																									
												5	5W	200mA	850	CRI>80	5000K	WF	50° - Wide Flood	03	black															
																						840	CRI>80	4000K	04	gray										
																											850	CRI>80	5000K	05	dark gray					
																																927	CRI>90	2700K	06	special color
935	CRI>90	3500K																																		
			940	CRI>90	4000K																															

Accessories / Aksesuarlar

Visor / Işık Siperi



Ext.Code / Kod:

.VIS

•

Honeycomb Filter / Petekli Filtre



Ext.Code / Kod:

.VBP

•

Linear Spread Diffuser / Işık Yayıcı Difüzör



Ext.Code / Kod:

.LSD

•

Softening Diffuser / Işık Yumuşatıcı Difüzör



Ext.Code / Kod:

.VSD

•