




kg	kg	kg	kg
2.8	3.5	4.2	4.9
.24.35	.24.43	.24.51	.24.60

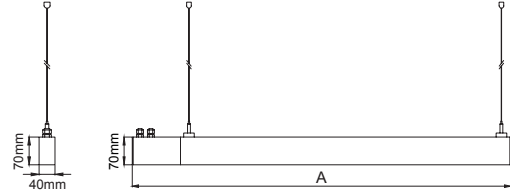

- Aluminium profile body.
- Aluminium end caps.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design.
- 1-10V, DALI and Wireless Tunable White dimming options available upon request.
- Lens optic on indirect side.
- Basic colours: white, black, silver, antracite dark gray and special color options available upon request.
- Steel suspension cord with up to 5mt length option.
- Inverted 3-phase track on the lower side of the profile.

- Alüminyum profil gövde.
- Alüminyum kapak.
- 220-240V / 50-60Hz enerji girişi.
- Akıllı soğutma tasarımı.
- 1-10V, DALI ve Kablosuz Dinamik Beyaz dim seçenekleri bulunmaktadır.
- Endirekt tarafı lens optikli.
- Standart renkler: beyaz, siyah, gri, antrasit koyu gri ve isteğe bağlı özel renk seçenekleri mevcuttur.
- 5mt uzunluk seçeneğine kadar tercih edilebilir çelik sarkıt tel.
- Profilin alt tarafına entegre 3-fazlı ray.

Tone / I02.LL.19600

SMD LED	.24.35	.24.43	.24.51	.24.60
Led Power / Led Gücü	32W	40W	47W	56W
System Power / Sistem Gücü	35W	43W	51W	60W
Lumen Output from Fixture / Armatür Çıkış Lümeni CRI>80	2700K	3515	4335	5120
	3000K	3625	4470	5280
	3500K	3735	4605	5440
	4000K	3850	4750	5610
	5000K	3965	4890	5780
Lenght / Uzunluk (A)	1215mm	1495mm	1775mm	2055mm
Ceiling Cutout Dimension / Tavan Delik Ölçüsü	X	X	X	X
1-10V Dimming Option / 1-10V Dim Seçeneği	✓	✓	✓	✓
Dali Dimming Option / Dali Dim Seçeneği	✓	✓	✓	✓
Wireless Tunable White Dim / Kablosuz Dinamik Beyaz Dim	✓	✓	✓	✓

Suspension Cord

Ray Sarkıtma Teli

