


Deepress Surface




5 / Product Color / Ürün Renk



Technical Drawing / Teknik Çizim

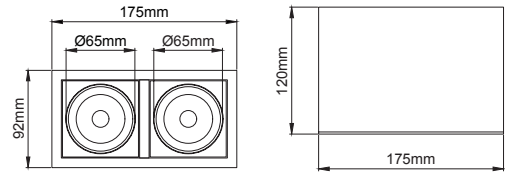

4 / Reflector Angle / Reflektör Açısı

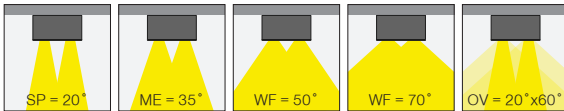

EN

- Die-cast aluminium body.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design with passive heat dissipation.
- 15° rotation on single axis with mechanical aiming lock.
- Classic dimming systems of DALI, 1-10V and Phase-Cut Dim options.
- High tech control systems of Tuneable White, Warm Dim and Wireless Dim options.
- Basic colours: White, Black, Gray, Dark Gray, RAL9010 and special color options.
- Only Honeycomb Filter accesorie is available.
- Spot, Medium, Flood, Wide Flood and Oval beam angle options available with rotationally symmetric light distribution.
- Standart CRI>80, high CRI>90 and super high CRI>98 LED options available.
- Up to 121lm/W efficiency.
- High colour consistency: <3 SDCM
- Emergency kit system can be integrated.

TR

- Alüminyum enjeksiyon gövde.
- 220-240V / 50-60Hz enerji giriřli.
- Pasif soğutma teknolojisine sahip akıllı soğutma tasarımı.
- Tek ekseninde 15° hareket kabiliyetine sahip mekanik kilitlemeli sistem.
- Klasik DALI, 1-10V ve Faz DIM seçenekleri uygulanabilir.
- Yüksek teknoloji kontrol sistemleri olan Kablosuz DIM, Sıcak DIM ve Dinamik Beyaz uygulamaları yapılabilir.
- Standart renk seçenekleri: Beyaz, Siyah, Gri, Koyu Gri, RAL9010 yanında isteğe bađlı özel renk seçenekleri uygulanabilir.
- Sadece Balpeteđi Filtre aksesuar seçeneđi uygulanabilir.
- Dar, Orta, Geniř, Çok Geniř ve Oval lens açi seçenekleri mevcuttur.
- Standart CRI>80, yüksek CRI>90 ve ekstra yüksek CRI>98 LED seçenekleri mevcuttur.
- 121lm/W'a varan verim.
- Yüksek renk uyumu: <3 SDCM
- Acil aydınlatma kit sistemi uygulanabilir.

Deepress Surface

Deepress Surface / I01.MLS.14036



* Code example / Kod örneği:

I01.MLS.14036 . 15 . 827 . SP . 01

- 1- Product code / Armatür kodu
- 2- Power / Güç
- 3- CRI / Kelvin
- 4- Reflector angle / Reflektör açısı
- 5- Colour / Ürün renk

| Power / Güç | CRI | Order Code / Sipariş Kodu | Kelvin | Lümen T _c =50° Lümen |
|-------------|------------------|--|--------|---------------------------------|
| 2x15W | CRI>80 | I01.MLS.14036 . (.) . (...) . (.) . (..) | 2700K | 3302 |
| | | | 3000K | 3404 |
| | | | 3500K | 3524 |
| | | | 4000K | 3642 |
| | | | 5000K | 3896 |
| | CRI>90 | I01.MLS.14036 . (.) . (...) . (.) . (..) | 2700K | 2972 |
| | | | 3000K | 3064 |
| | | | 3500K | 3200 |
| | | | 4000K | 3336 |
| | | | 5000K | X |
| | CRI>98 | I01.MLS.14036 . (.) . (...) . (.) . (..) | 2700K | 2170 |
| | | | 3000K | 2250 |
| | | | 4000K | 2410 |
| | Meat / Et COB | I01.MLS.14036 . (.) . (...) . (.) . (..) | 1800K | X |
| | Food / Gıda COB | I01.MLS.14036 . (.) . (...) . (.) . (..) | 2400K | X |
| | FISH / Balık COB | I01.MLS.14036 . (.) . (...) . (.) . (..) | 6600K | X |

| 2 | Watt - Driving Current / Watt - Sürüş Akımı | 3 | | CRI / Kelvin | | 4 | Reflector Angle / Reflektör Açısı | 5 | | Product Color / Ürün Renk | |
|----|---|------|-----------------|--------------|----------------|---|-----------------------------------|-----------------|---------------|---------------------------|---------------|
| | | Watt | Driving Current | CRI | Kelvin | | | Reflector Angle | Product Color | Product Color | Product Color |
| 15 | 2x15W - 350mA | 827 | CRI>80 - 2700K | 9827 | CRI>98 - 2700K | | SP 20° - Spot | | 01 | white | |
| 10 | 2x10W - 250mA | 830 | CRI>80 - 3000K | 9830 | CRI>98 - 3000K | | ME 35° - Medium | | 02 | ral 9010 | |
| 7 | 2x7W - 180mA | 835 | CRI>80 - 3500K | 9840 | CRI>98 - 4000K | | FL 50° - Flood | | 03 | black | |
| 4 | 2x4W - 100mA | 840 | CRI>80 - 4000K | | | | WF 70° - Wide Flood | | 04 | gray | |
| | | 850 | CRI>80 - 5000K | | | | OV 20° x 60° - Oval | | 05 | dark gray | |
| | | 927 | CRI>90 - 2700K | | | | | | 06 | special color | |
| | | 930 | CRI>90 - 3000K | | | | | | | | |
| | | 935 | CRI>90 - 3500K | | | | | | | | |
| | | 940 | CRI>90 - 4000K | | | | | | | | |

(.) / Complete Code / Komple Kod