



# STEEL 200 Floodlight

## 8474318

STEEL 200 Floodlight - 9 LED 3000K 45°



## Lighting information

Source power type	9 LED
Colour temperature	3000K
CRI	>80
MCADAMS	3
LM 80/TM-21	L80B10@>60Kh

Source power	14,50 W
Nominal flux	1710 lm

Plug-in power	15,00 W
Real flux	1140 lm
Maximum intensity	1460 cd/klm
Beam angle	45°

Power Supply Unit	24V
Operating frequency	DC
Dimmable	Not dimmable
Safety class	III
Wiring	External
Cable section	2 x 2,50 mm <sup>2</sup>
Cable length	5.000 mm;
Cable type	H07RN-F
Connector	To be ordered separately

Protection Rating	P68 Full Dry (2m)
Breaking Strength	IK 08

Energy efficiency class	A/A+/A++
Diffuser type	Serigraphed extra-clear glass
Diffuser thickness	12 mm



## Platek®

PLATEK s.r.l.  
Via Paderno, 19 | 25050 Rodengo Saiano (BS) ITALY  
P.IVA 03320290178 | Codice fiscale 03007130176  
Registro delle Imprese di Brescia n. 03007130176 REA 311057  
Capitale sociale Euro 1.000.000,00 i.v. Società con unico socio

Last update:04/02/2022



# STEEL 200 Floodlight


## 8474318

STEEL 200 Floodlight - 9 LED 3000K 45°


## Product features

Body and locking flange manufactured in AISI 316L stainless steel with electropolishing treatment. No visible screws. IP68 protection with Full Dry system which avoids condensation inside the product. External power supply with 24V constant-current transformer, to be wired in parallel.

## Technical dimensions

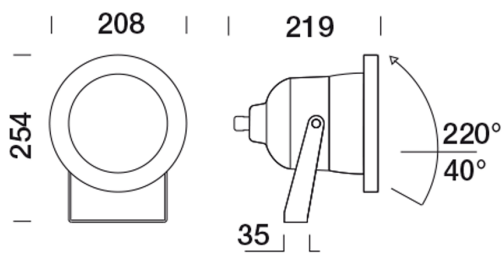

## Lighting information



Plug-in power	15,00 W
Real flux	1140 lm
Maximum intensity	1460 cd/klm
Beam angle	45°

Plug-in power	15,00 W
Real flux	1140 lm
Maximum intensity	1460 cd/klm
Beam angle	45°

## Technical shipping information

Net weight	4,70 kg
Gross weight	5,00 kg
Packaging width	260,00 mm
Packaging height	260,00 mm
Packaging depth	400,00 mm

**Platek®**

PLATEK s.r.l.  
Via Paderno, 19 | 25050 Rodengo Saiano (BS) ITALY  
P.IVA 03320290178 | Codice fiscale 03007130176  
Registro delle Imprese di Brescia n. 03007130176 REA 311057  
Capitale sociale Euro 1.000.000,00 i.v. Società con unico socio

Last update:04/02/2022



# STEEL 200 Floodlight

## 8474318

STEEL 200 Floodlight - 9 LED 3000K 45°

## Mechanical accessories



8918650  
Elliptical filter



8918655  
Sandblasted filter




# STEEL 200 Floodlight


## 8474318

STEEL 200 Floodlight - 9 LED 3000K 45°


## Electrical accessories




8917004  
IP68 IN/OUT connector for 3x4 mm<sup>2</sup> cable



8956127  
IP67 Power supply (24V DC - 75W)



8956307  
IP20 Power supply (24V DC - 75W)



8956313  
Power supply DALI (24V DC - 120W) IP67



# STEEL 200 Floodlight

## 8474318

STEEL 200 Floodlight - 9 LED 3000K 45°

### Full Inox

This material has high structural features that allow optimal combinations with other elements and great resistance to corrosion with little need for maintenance over time. Stainless steel is particularly suitable for exposure in aggressive environments, such as marine areas, cities with high pollution rates, chlorine-rich spaces and areas with elevated salt use during harsh Nordic winters.

### Precise LED selection

All LEDS used by Platek, once assembled by trusted personnel are tested with suitable instruments to check the colour specification required by Platek standards. The choice of using only 3 McAdams colour steps and with a CRI value exceeding 90, provide a high level of light quality that is difficult to find in the world of outdoor lighting. As far as LED products are concerned, Platek has adopted a system of protection against electrostatic discharge along the entire production chain of electronic components to increase the resistance of circuits to power surges.

**Platek®**

PLATEK s.r.l.  
Via Paderno, 19 | 25050 Rodengo Saiano (BS) ITALY  
P.IVA 03320290178 | Codice fiscale 03007130176  
Registro delle Imprese di Brescia n. 03007130176 REA 311057  
Capitale sociale Euro 1.000.000,00 i.v. Società con unico socio

Last update:04/02/2022