


Mira 65 | 5 W | double 120° | Floor recessed

Also available for wall recessed

Technical Specifications


Source lamp	LED 5 W
Total wattage	5
Voltage	220-240 Vac - 50/60 Hz
Control	On/Off • dimmable on request
Luminous flux (*Source flux)	42 lm (400 lm*) @ 3000 K
Luminous efficacy	8.5 lm/W @ 3000 K
McADAM steps	3
Beam	double 120°
CRI	>80
Life time	L 70 > 50.000 h Ta 25°C L 70 > 50.000 h Ta 40°C
IP rating	67
IK rating	8
Insulation class	II

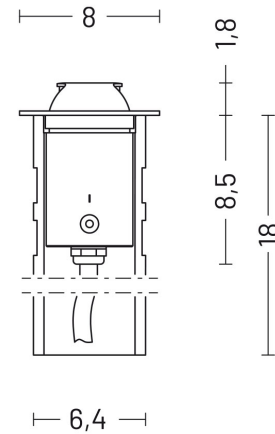


Materials

Body	Extruded aluminium EN AW6060
Diffuser	Opal polycarbonate
Finishing	Inox - Anodized

Isolux

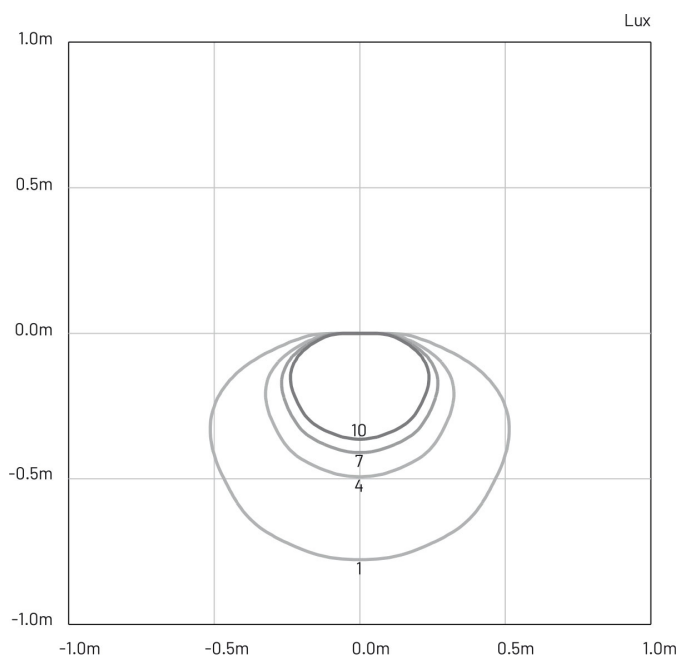

Photometry

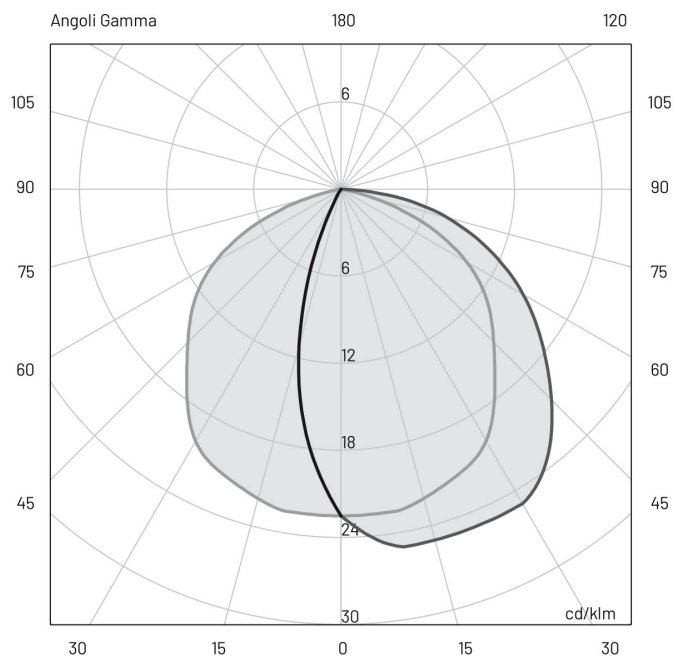

Included accessories

- 1 m length cable H05RN-F
- Housing box

Available accessories

0404M009

Single connection IP68