


Polos_2 | 14 W | diffuse | Bollards

115 cm

Technical Specifications


Source lamp	LED 14 W
Total wattage	16
Voltage	220-240 Vac - 50/60 Hz
Control	On/Off • dimmable on request
Luminous flux (*Source flux)	680 lm (1560 lm*) @ 3000 K
Luminous efficacy	42.5 lm/W @ 3000 K
McADAM steps	3
Beam	diffuse
CRI	>90
Life time	L 70 > 50.000 h Ta 25°C L 70 > 50.000 h Ta 40°C
IP rating	65
IK rating	8
Insulation class	I

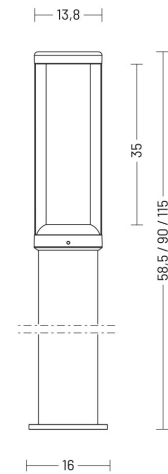


Materials

Body	Die-cast aluminium EN47100 and extruded aluminium EN AW6060
Diffuser	Extra clear polycarbonate
Finishing	Graphite - Polyester powder paint

Isolux

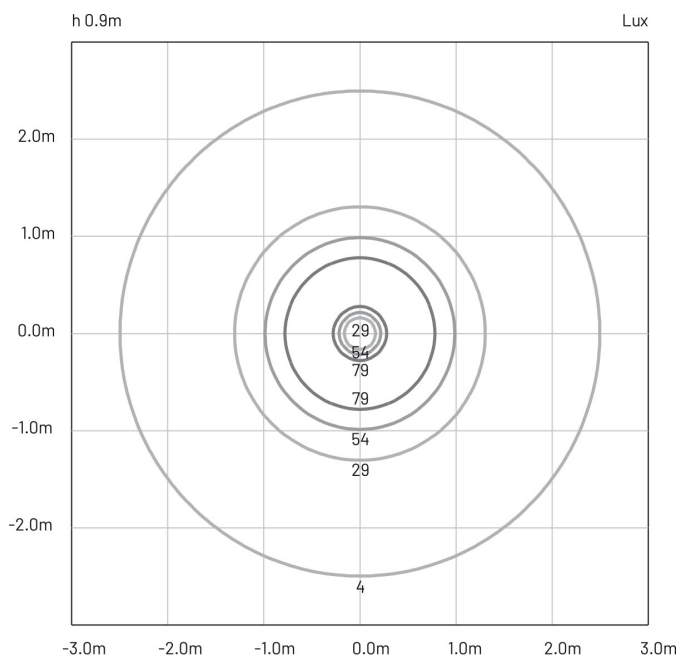

Photometry

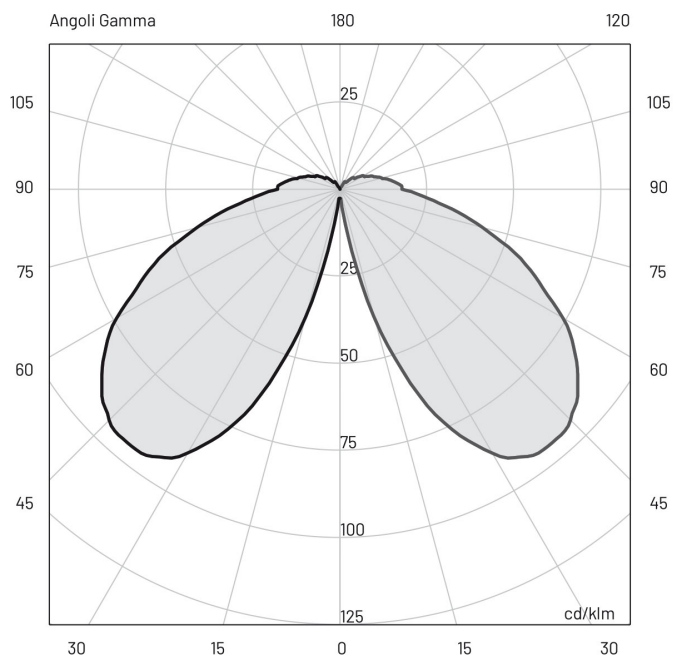

Available accessories

00A405.01P

Anchor bolt

0404M003

Loop-in loop-out IP68

00A405

Root mounting kit

0404M004

Single connection IP68