


- Aluminium profile body.
- Plastic end caps.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design.
- 1-10V and DALI dimming options available upon request.
- Opal diffuser and alternatively clear diffuser options available.
- Basic colours: white, black, silver, antracite dark gray and special color options available upon request.
- Up to 85lm/W efficiency.
- Tilttable light heads.
- Emergency kit system can be integrated.

- Alüminyum profil gövde.
- Plastik kapak.
- 220-240V / 50-60Hz enerji girişi.
- Akıllı soğutma tasarımı.
- 1-10V ve DALI dim seçenekleri bulunmaktadır.
- Opal difüzörlü ve alternatif olarak şeffaf difüzör seçeneği mevcuttur.
- Standart renkler: beyaz, siyah, gri, antrasit koyu gri ve isteğe bağlı özel renk seçenekleri mevcuttur.
- 85lm/W'a kadar verim.
- Yönlendirilebilir ışık gövdesi.
- Acil aydınlatma kit sistemi uygulanabilir.

Suspension Cord

Ray Sarkıtma Teli

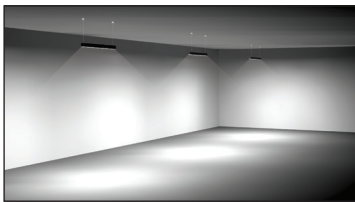

Market / I02.LL.19205

SMD LED	.50	.67
Led Power / Led Gücü	47W	63W
System Power / Sistem Gücü	50W	67W
Lumen Output from Fixture / Armatür Çıkış Lümeni CRI>80	2700K	3825
	3000K	3940
	3500K	4050
	4000K	4180
	5000K	4300
Lenght / Uzunluk (A)	900mm	1180mm
Ceiling Cutout Dimension / Tavan Delik Ölçüsü	X	X
Mains Switch Dim Option / 220V Anahtar Dim Opsiyonu	X	X
1-10V Dimming Option / 1-10V Dim Seçeneği	✓	✓
Dali Dimming Option / Dali Dim Seçeneği	✓	✓

