
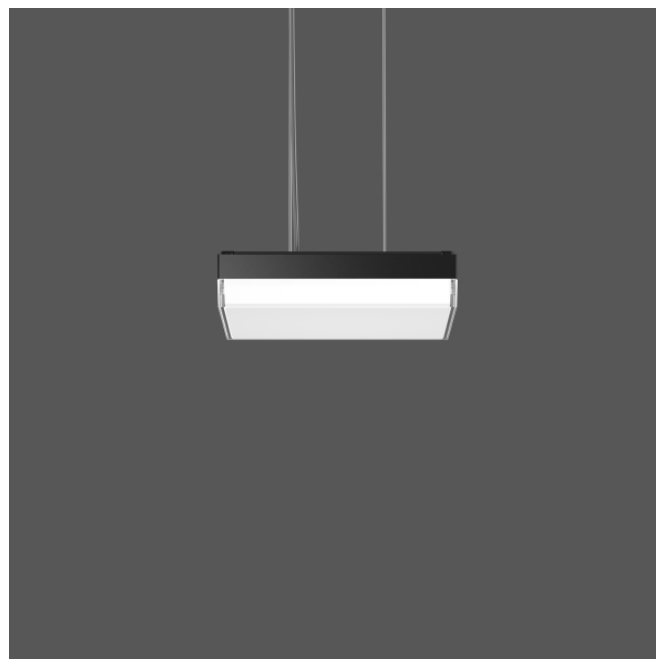


# Flat Slim+

312542.0031.76 | Pendant luminaires

Pendant luminaires  
4051859502999  
LED  
L 300, B 300, H 70



Decorative square LED pendant luminaire. Base: pressure die-cast aluminium, powder-coated. Standard Gore™ Protective Vents diaphragm valve to avoid condensation. Canopy: aluminium, powder-coated. Diffuser: high-polish crystal glass, painted inside, with fixing device. Diffuser with frame made of pressure die-cast aluminium, powder coated, bonded. Diffuser attached with clip system. Homogeneous and smooth light distribution. Suitable for Pendant. 4-point steel cable suspension, steplessly adjustable. Special lengths available on request. Transparent connecting cable. MultiLumen: 2 steps adjustable luminous flux. MultiColour: Colour temperature adjustable via jumper. Factory setting is 3000 K.

## Colour

Colour anthracite metallic

## Dimensions

Length L 300 mm  
Width B 300 mm  
Height H 70 mm  
Suspension length 500-1200 mm  
Weight 5,712 kg

## Lamp

Lamp 1 LED  
Socket lamp 1 Plug  
Colour temperature lamp 1 3000K, 4000K  
Colour rendering index (CRI) 1 80  
Lifetime of lamp 1 combined 50000 h (L80/B10)  
Photobiological safety according to EN 62471 Risk group 1

## Lighting technology

Colour temperature 4.000 K  
Rated luminous flux 2.300 lm  
Glare evaluation UGR (4H 8H) 1 22,5  
Beam angle 122°  
Colour temperature 2 3.000 K  
Rated luminous flux 2 2.150 lm  
Glare evaluation UGR (4H 8H) 2 22,3  
Colour temperature 3 4.000 K  
Beam angle Down 2 122°  
Rated luminous flux 3 1.400 lm  
Glare evaluation UGR (4H 8H) 3 20,8  
Colour temperature 4 3.000 K  
Beam angle Down 3 122°  
Rated luminous flux 4 1.300 lm  
Glare evaluation UGR (4H 8H) 4 20,5  
Beam angle Down 4 122°

## Electrical

Control gear DALI  
Voltage 220 - 240 V / 50 Hz, 60 Hz  
Luminaires on B10A fuse 31  
Luminaires on B16A fuse 50  
Luminaires on C10A fuse 52  
Luminaires on C16A fuse 85  
Inrush current / inrush current duration 5 A / 50 µs  
System power 21 W  
Luminaire efficacy 110 lm/W  
System power 2 21 W  
Luminaire efficacy 2 103 lm/W  
Power factor 0,95  
System power 3 13 W  
Luminaire efficacy 3 108 lm/W  
System power 4 13 W  
Luminaire efficacy 4 100 lm/W

# Flat Slim+

312542.0031.76 | Pendant luminaires



## Approbations

Type of Protection	IP 40
Protection Class	I
Glow Wire Test	650°C - 30 seconds
Impact Protection	IK07 (2 Joule)
Safety marks	F-mark
Ambient temperature min.	-20 °C
Ambient temperature max.	35 °C
ULOR	9
Trade mark	CE, EAC
CIE Flux Code / CEN Flux Code	43 75 93 91 100
Non-maintained power mode	Umgebungstemperatur / temperature ambiente => -20 °C ... + 35 °C