

## Mira 45 LT | 2 W | flood 35° | Floor recessed


Also available for wall recessed

### Technical Specifications

all the technical specifications are related to one head only

<b>Source lamp</b>	LED 2 W
<b>Total wattage</b>	2
<b>Voltage</b>	24 Vdc
<b>Control</b>	Power supply not included • dimmable on request
<b>Luminous flux (*Source flux)</b>	102 lm (160 lm*) @ 3000 K
<b>Luminous efficacy</b>	51 lm/W @ 3000 K
<b>McADAM steps</b>	3
<b>Beam</b>	flood 35°
<b>CRI</b>	>90
<b>Life time</b>	L 70 > 50.000 h Ta 25°C L 70 > 50.000 h Ta 40°C
<b>IP rating</b>	66
<b>IK rating</b>	6
<b>Insulation class</b>	III

4,2



2,6 + 3,7

7


4




### Materials

<b>Body</b>	Extruded aluminium EN AW6060
<b>Diffuser</b>	Extra clear polycarbonate
<b>Finishing</b>	Inox - Anodized

## Isolux

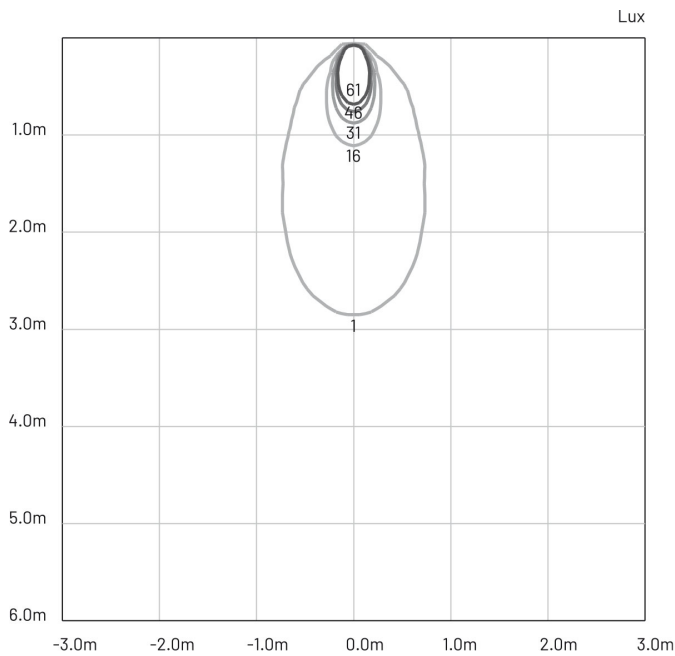

## Photometry

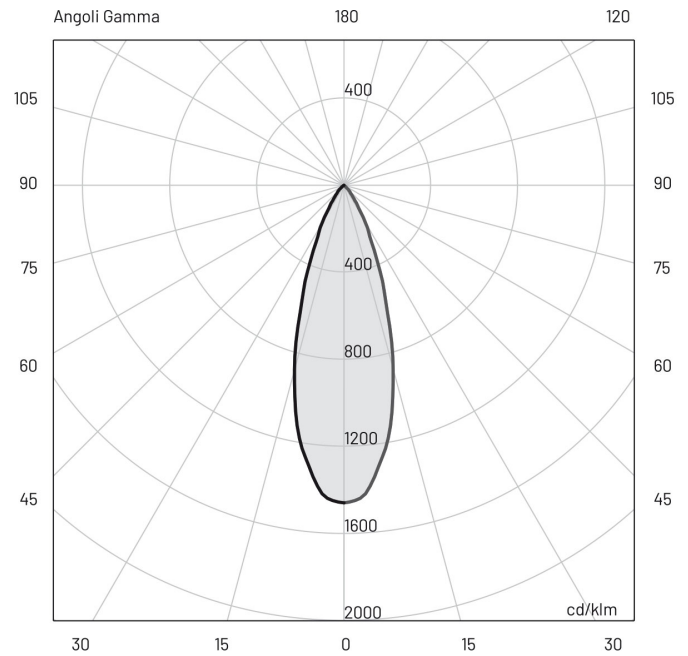

## Included accessories

- 1 m length cable -05RN-F
- Housing box

## Available accessories

- |                  |  |
|------------------|--|
| <b>0404M009</b>  | Single connection IP68<br>Only for floor recessed        |
| <b>0409BT016</b> | Transformer _ 24 Vdc - 100 W<br>Connect up to 30 devices |
| <b>0409BT014</b> | Transformer _ 24 Vdc - 12 W<br>Connect up to 4 devices   |
| <b>0409BT015</b> | Transformer _ 24 Vdc - 25 W<br>Connect up to 8 devices   |