


Mira 45 | 2 W | quadruple | Floor recessed

Also available for wall recessed

Technical Specifications


Source lamp	LED 2 W
Total wattage	2
Voltage	24 Vdc
Control	Power supply not included • dimmable on request
Luminous flux (*Source flux)	24 lm (160 lm*) @ 3000 K
Luminous efficacy	12 lm/W @ 3000 K
McADAM steps	3
Beam	quadruple
CRI	>90
Life time	L 70 > 50.000 h Ta 25°C L 70 > 50.000 h Ta 40°C
IP rating	67
IK rating	8
Insulation class	III

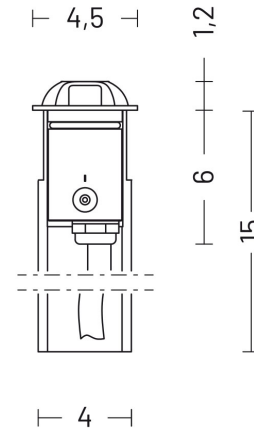


Materials

Body	Extruded aluminium EN AW6060
Diffuser	Opal polycarbonate
Finishing	Inox - Anodized

Isolux

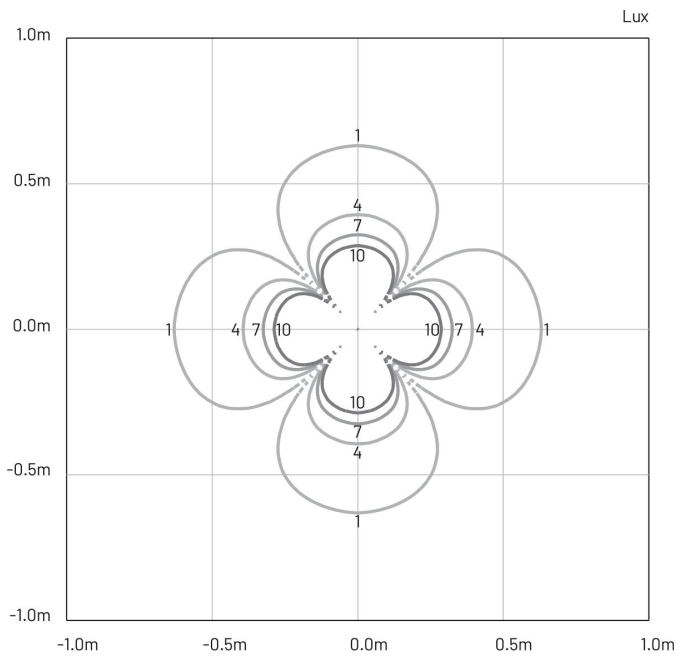

Photometry

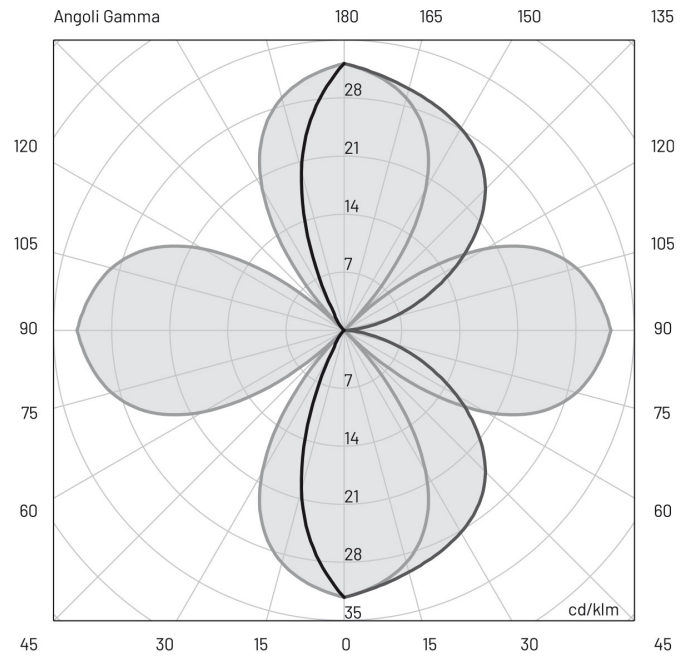

Included accessories

- 1 m length cable -05RN-F
- Housing box

Available accessories

- | | |
|------------------|----------------------------------------------------------|
| 0404M009 | Single connection IP68
Only for floor recessed |
| 0409BT016 | Transformer _ 24 Vdc - 100 W
Connect up to 30 devices |
| 0409BT014 | Transformer _ 24 Vdc - 12 W
Connect up to 4 devices |
| 0409BT015 | Transformer _ 24 Vdc - 25 W
Connect up to 8 devices |