


- Aluminium profile body.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design.
- 1-10V and DALI dimming options available upon request.
- Opal diffuser enables light output to every direction.
- Basic colours: white, black, silver, antracite dark gray and special color options available upon request.
- Over 75lm/W efficiency.
- Emergency kit system can be integrated.
- Steel suspension cord with up to 5mt lenght option.

- Alüminyum profil gövde.
- 220-240V / 50-60Hz enerji giriřli.
- Akıllı sođutma tasarımı.
- 1-10V ve DALI dim seçenekleri bulunmaktadır.
- Opal difüzör ışık çıkıřını her yöne verir.
- Standart renkler: beyaz, siyah, gri, antrasit koyu gri ve isteđe bađlı özel renk seçenekleri mevcuttur.
- 75lm/W'ın üzerinde verimlilik.
- Acil aydınlatma kit sistemi uygulanabilir.
- 5mt uzunluk seçeneđine kadar tercih edilebilir çelik sarkıt tel.

Suspension Cord

Ray Sarkıtma Teli

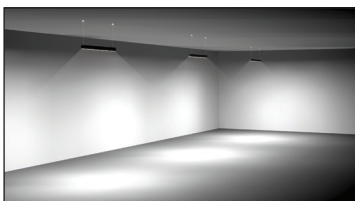

Square / I02.LL.19625

SMD LED	.24.72	.24.140	.24.204
Led Power / Led Gücü	66W	130W	190W
System Power / Sistem Gücü	72W	140W	204W
Lumen Output from Fixture / Armatür Çıkıř Lümeni CRI>80	2700K	6000	14820
	3000K	6188	15276
	3500K	6312	15582
	4000K	6440	15893
	5000K	6632	16370
Lenght / Uzunluk (A)	585mm	1085mm	1585mm
Lenght / Uzunluk (B)	585mm	1085mm	1585mm
Ceiling Cutout Dimension / Tavan Delik Ölçüsü	X	X	X
Mains Switch Dim Option / 220V Anahtar Dim Opsiyonu	X	X	X
1-10V Dimming Option / 1-10V Dim Seçeneđi	✓	✓	✓
Dali Dimming Option / Dali Dim Seçeneđi	✓	✓	✓

