


Oko | 12 W | double asymmetric "upside down" | Bollards

95 cm

Technical Specifications


Source lamp	LED 12 W
Total wattage	16
Voltage	220-240 Vac - 50/60 Hz
Control	On/Off • dimmable on request
Luminous flux (*Source flux)	526 lm (1040 lm*) @ 3000 K
Luminous efficacy	30 lm/W @ 3000 K
McADAM steps	3
Beam	double asymmetric "upside down"
CRI	>90
Life time	L 70 > 50.000 h Ta 25°C L 70 > 50.000 h Ta 40°C
IP rating	65
IK rating	8
Insulation class	I

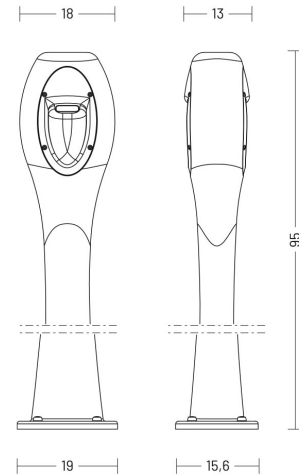


Materials

Body	Die-cast aluminium EN47000
Diffuser	Extra clear polycarbonate
Finishing	Graphite - Polyester powder paint

Isolux

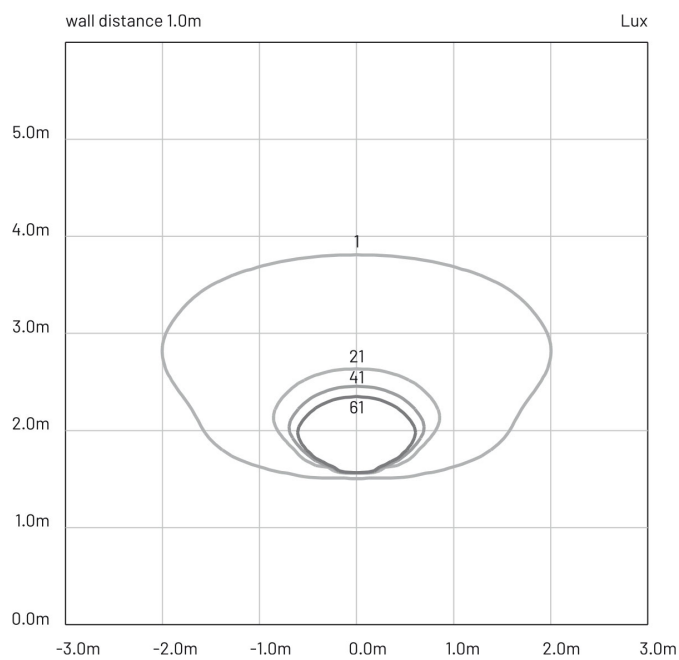

Photometry

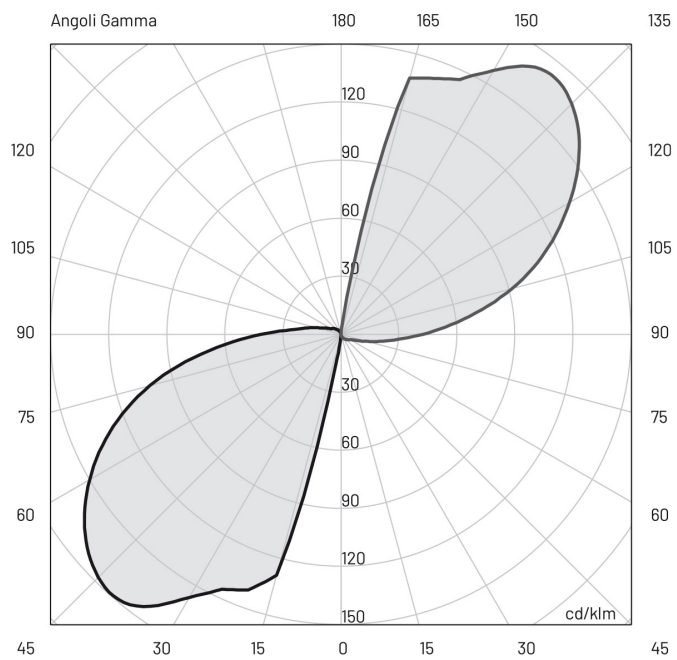

Available accessories

00A406.01P

Anchor bolt

0404M003

Loop-in loop-out IP68