
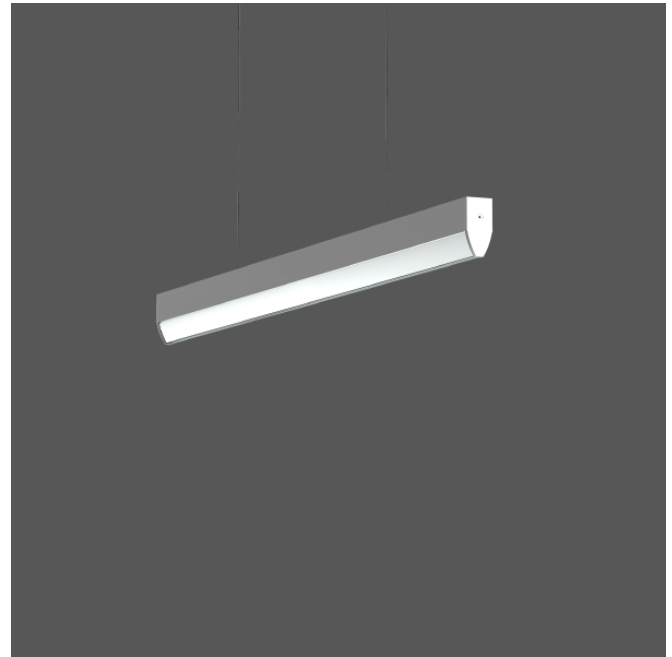


# Lavano Uno

451200.000 | Pendant luminaires

Pendant luminaires  
4051859173601  
LED  
L 1140, B 40, H 83



Linear pendant luminaire in elegant design. Extruded aluminium profile base, lacquered. End caps aluminium, painted. Diffuser: plastic, opal, allows for brilliant glittering light along the lines of the ellipse. Suitable for Pendant. 2-point steel cable suspension, steplessly adjustable. Special lengths available on request.

## Colour

Colour white aluminium

## Dimensions

Length L 1.140 mm  
Width B 40 mm  
Height H 83 mm  
Suspension length LP 1200 mm  
Weight 2,98 kg

## Lamp

Lamp LED  
Colour temperature 3000K  
Colour rendering index (CRI) 80  
Colour tolerance 3  
Rated life 50000 h (L90/B10)  
Photobiological safety according to EN 62471 Risk group 1

## Lighting technology

Colour temperature 3.000 K  
Rated luminous flux 2.500 lm  
Glare evaluation UGR (4H 8H) 1 24,7  
Beam angle 146° / 108°

## Electrical

Control gear	Converter
Voltage	220 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	10
Luminaires on B16A fuse	17
Luminaires on C10A fuse	16
Luminaires on C16A fuse	26
Inrush current / Inrush current duration	49 A / 154 $\mu$ s
Ripple current / Flicker	10 %
System power	23 W
Luminaire efficacy	109 lm/W
Total harmonic distortion	10 %
Power factor	0,98

## Approbations

Type of protection	IP 40
Note: Type of Protection	IP 40
Protection class	I
Filament test	650°C - 30 seconds
Impact resistance	IK02 (0,20 Joule)
Safety marks	F-mark
ULOR	22,7 %
Conformity mark	CE, EAC
CIE Flux Code / CEN Flux Code	36 62 83 77 100
Energieeffizienzklasse 2019/2015	E