


## Mira 220 | 30 W | spot 20° | Floor recessed

Round frame

### Technical Specifications

<b>Source lamp</b>	LED 30 W
<b>Total wattage</b>	30
<b>Voltage</b>	220-240 Vac - 50/60 Hz
<b>Control</b>	IGBT-TRIAC • dimmable on request
<b>Luminous flux (*Source flux)</b>	1848 lm (2620 lm*) @ 3000 K
<b>Luminous efficacy</b>	61.6 lm/W @ 3000 K
<b>McADAM steps</b>	3
<b>Beam</b>	spot 20°
<b>CRI</b>	>90
<b>Life time</b>	L 70 > 50.000 h Ta 25°C L 70 > 50.000 h Ta 40°C
<b>IP rating</b>	67
<b>IK rating</b>	10
<b>Insulation class</b>	I

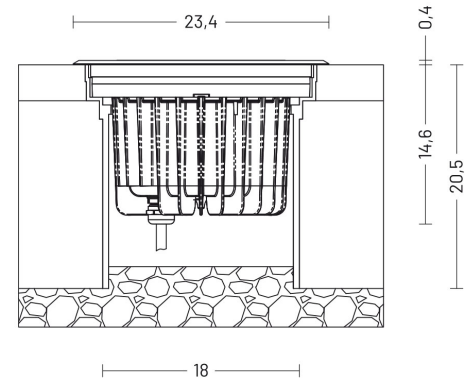


### Materials

<b>Body</b>	Die-cast aluminium EN47100
<b>Diffuser</b>	Extra clear tempered glass 19 mm
<b>Finishing</b>	Inox AISI 316L - Inox AISI 316L

E (lux)

H (m)	lux (3000 K)	lux (4000 K)	Ø (m)
1.00	7150	7617	0.4
2.00	1787	1904	0.7
3.00	794	846	1.1
4.00	447	476	1.4
5.00	286	305	1.8

Photometry

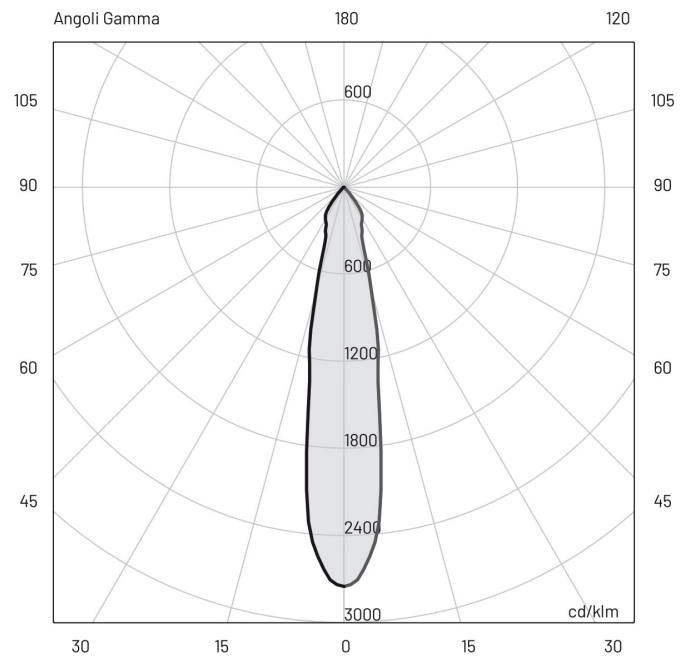

### Included accessories

- 2 m length cable H07RN-F
- Housing box

### Available accessories

<b>0404M003</b>	Loop-in loop-out IP68
<b>0201001V0400</b>	Non-slip glass
<b>0201001V0200</b>	Sandblasted glass
<b>00KAV04</b>	Set antivandalism screws
<b>0404M004</b>	Single connection IP68
<b>0303CA3</b>	Tool for antivandalism screws