
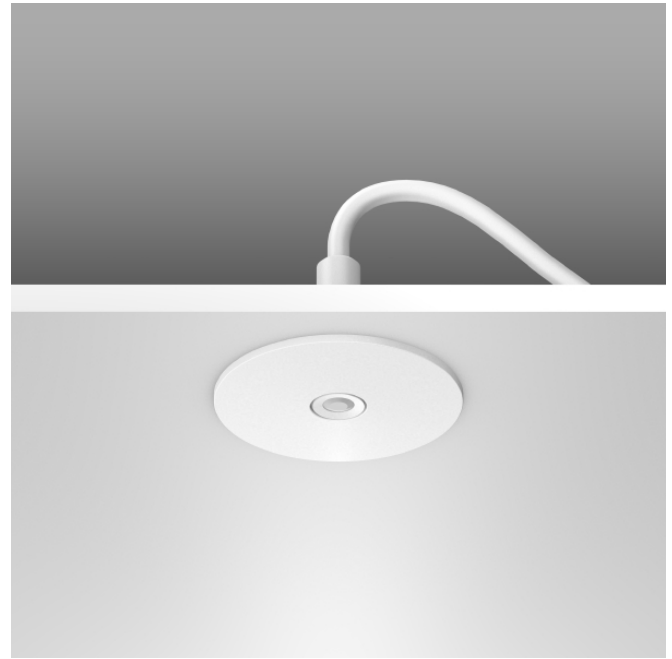


Turia

672410.002 | Self-contained safety luminaires

Recessed ceiling luminaires
4051859461654
LED
D 55, H 2, HEL 50



Housing: aluminium. Bezel ring: plastic. Control gear and battery in separate box with connecting cable. Self-contained system with automatic self-test.

Emergency lighting

Emergency luminaire	with integrated battery (self-contained)
Battery Option	NiMH
Operating mode	Non-maintained power mode
Monitoring	Automatic self-test
Luminaire flux Mains/Emergency	90 lm
Duration time	8 h

Colour

Colour	white
--------	-------

Dimensions

Diameter D	55 mm
Height H	2 mm
Cut-out diameter DA	42 mm
Recess height HE	150 mm
Luminaire: recess height HEL	50 mm
Ceiling thickness S	1-35 mm
Weight	550 g

Lamp

Lamp 1	LED
Colour temperature lamp 1	5000 K
Colour rendering index (CRI) 1	80

Lighting technology

Colour temperature	5.000 K
Rated luminous flux	120 lm
Glare evaluation UGR (4H 8H) 1	36,8
Beam angle	93° / 100°

Electrical

Control gear	Converter
Voltage	220 - 240 V / 50 - 60 Hz
System power, emergency	0,1 W
System power	2,5 W
Luminaire efficacy	48 lm/W

Approbations

Type of Protection	IP 20
Protection Class	II
Glow Wire Test	850°C - 30 seconds
Impact Protection	IK03 (0,35 Joule)
Safety marks	F-mark
ULOR	0,6
Trade mark	CE
CIE Flux Code / CEN Flux Code	49 79 94 99 100