
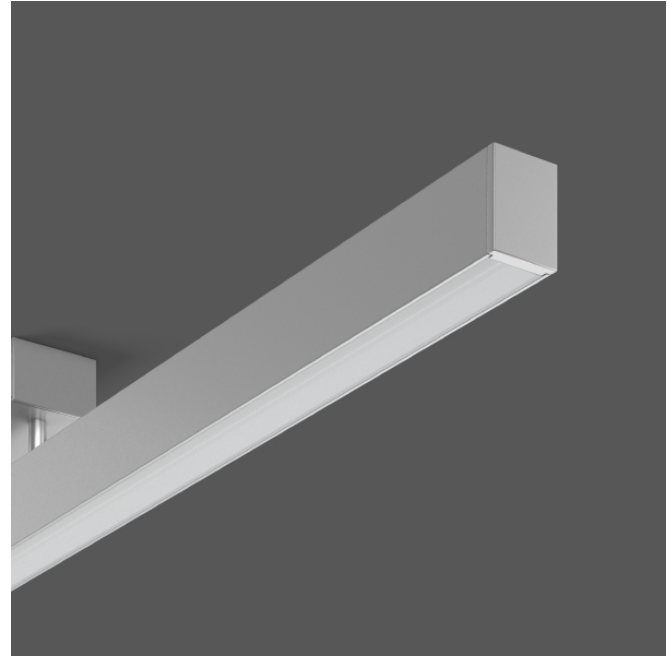



# Less is more 27

312193.0045.1 | LED linear systems

Ceiling and wall luminaires  
 4051859284154  
 LED  
 L 1212, B 42, H 88



Ceiling luminaire with slim design. Housing: extruded aluminium profile, powder-coated. End cap aluminium powder-coated. Diffuser made of non-yellowing plastic (PMMA) microprismatic. Suitable for Ceiling mounting, Wall (surface). Converter integrated in the canopy.

### Colour

Colour white aluminium

### Dimensions

Length L 1.212 mm  
 Width B 42 mm  
 Height H 87,5 mm  
 Weight 1,89 kg

### Lamp

Lamp 1 LED  
 Colour temperature lamp 1 4000K  
 Colour rendering index (CRI) 1 82  
 Colour consistency (McAdam) 1 3  
 Lifetime of lamp 1 combined 60000 h (L80/B10)  
 Photobiological safety according to EN 62471 Risk group 1

### Lighting technology

Rated luminous flux 2.000 lm  
 Glare evaluation UGR (4H 8H) 1 24

### Electrical

Control gear	Converter
Voltage	220 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	13
Luminaires on B16A fuse	21
Luminaires on C10A fuse	22
Luminaires on C16A fuse	35
Inrush current / inrush current duration	21 A / 275 $\mu$ s
Ripple current / Flicker	2,7 %
System power	31 W
Luminaire efficacy	65 lm/W
Power factor	0,95

### Approbations

Type of Protection	IP 20
Protection Class	I
Glow Wire Test	650°C - 30 seconds
Safety marks	F-mark
Trade mark	CE
Energy efficiency class LED	A++
Energy class of included lamp	A++