



Milena LED



Modern LED lighting luminaire with high luminous efficiency and subtle design, is an ideal application for representative rooms.

Materials: Powder painted aluminum profile in two colors: grey and black, microprismatic MPRM diffuser and PAR louver, possibility of painting in any color from RAL palette.

Installation: Suspended (suspension included).

Power: 230 V

ELECTRICAL DATA

Light source	LED
Type of equipment	AC
Voltage rating	220 ... 240 V
Light source included	Yes
Power factor	0.98

MECHANICAL DATA

Type of installation	Suspended
Housing material	Aluminum

INFORMATION

Colour	Milticolor
Operating temperature range	-15 ... 40 °C

CERTIFICATES

Degree of protection (IP)	IP40
Class of protection	I
Light source protection	Yes
CE	Yes
HACCP+	Yes
EAC	Yes

LIGHT DATA

Light colour	White
Color rendering index	84
Light distribution	Mid beam
Light distribution	DI
Class of luminaire	I
Light output degradation	B10
Lumen maintenance	L80
Lifetime	> 54000 h
MacAdam	SDCM 3
Lamp Lumen Maintenance Factor (after 60 000h)	85 %

OPTICAL DATA


Diffuser colour	Transparent
Diffuser material	Prismatic plastic
Reflector	None

AVAILABE VARIANTS

Product code	Luminaire power [W]	Louver/shutter	Luminaire luminous flux [lm]	Luminaire's luminous efficacy [lm/W]	Colour temperature	Weight [kg]
PX4020101 AK001.3322.830.A000	35	MPRM	3590	103	3000K	3.50
PX4020115 AK001.3322.840.A000	35	MPRM	3670	105	4000K	3.50

AVAILABE VARIANTS

Product code	Luminaire power [W]	Louver/shutter	Luminaire luminous flux [lm]	Luminaire's luminous efficacy [lm/W]	Colour temperature	Weight [kg]
PX4020108 AK002.3322.830.A000	45	MPRM	4690	104	3000K	4.50
PX4020122 AK002.3322.840.A000	45	MPRM	4790	106	4000K	4.50
PX4020129 AK003.3333.830.A000	27	PAR	3410	126	3000K	3.50
PX4020136 AK003.3333.840.A000	27	PAR	3490	129	4000K	3.50
PX4020143 AK004.3333.830.A000	51	PAR	6820	134	3000K	4.50
PX4020150 AK004.3333.840.A000	51	PAR	6970	137	4000K	4.50

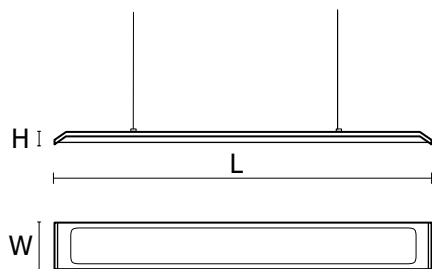

DIMENSIONS

Product code	L [mm]	W [mm]	H [mm]
PX4020101 AK001.3322.830.A000	1240	155	31
PX4020115 AK001.3322.840.A000	1240	155	31
PX4020108 AK002.3322.830.A000	1740	155	31
PX4020122 AK002.3322.840.A000	1740	155	31
PX4020129 AK003.3333.830.A000	1240	155	31
PX4020136 AK003.3333.840.A000	1240	155	31
PX4020143 AK004.3333.830.A000	1240	155	31
PX4020150 AK004.3333.840.A000	1240	155	31

L = Length | W = Width | H = Height / Depth

MOUNTING HOLES

Product code	A [mm]	B
PX4020101 AK001.3322.830.A000	860	-
PX4020115 AK001.3322.840.A000	860	-
PX4020108 AK002.3322.830.A000	1360	-
PX4020122 AK002.3322.840.A000	1360	-
PX4020129 AK003.3333.830.A000	860	139
PX4020136 AK003.3333.840.A000	860	139
PX4020143 AK004.3333.830.A000	860	139
PX4020150 AK004.3333.840.A000	860	139

A = Spacing length | B = Spacing width