



MICRO FULL STAINLESS STEEL Grazing light



8479011

MICRO FULL STAINLESS STEEL Grazing light - LED 3000K
1 Opening

Lighting information

Source power type	LED
Colour temperature	3000K
CRI	>80
MCADAMS	3
LM 80/TM-21	L80B10@>60Kh
Photobiological safety	RG1 @0,2m

Source power	1,50 W
Nominal flux	190 lm

Plug-in power	2,90 W
Real flux	15 lm
Maximum intensity	1200 cd/klm
Beam angle	1 Opening

Power Supply Unit	220 ÷ 240V
Operating frequency	0/50/60 Hz
Power factor	0,40
Dimmable	Not dimmable
Safety class	II
Luminaires of B16A MCB	Max 24
Inrush current	60A@120us
Wiring	External
Cable section	2 x 1,00 mm ²
Cable length	500 mm;
Cable type	H05RN-F
Connector	To be ordered separately

Protection Rating	P68 Full Dry (2m)
Breaking Strength	IK 10
Drive-over capacity	2.000 Kg

Energy efficiency class	A/A+/A++
Diffuser type	Transparent methacrylate
Diffuser thickness	3 mm



Platek®

PLATEK s.r.l.
Via Paderno, 19 | 25050 Rodengo Saiano (BS) ITALY
P.IVA 03320290178 | Codice fiscale 03007130176
Registro delle Imprese di Brescia n. 03007130176 REA 311057
Capitale sociale Euro 1.000.000,00 i.v. Società con unico socio

Last update:22/03/2022



MICRO FULL STAINLESS STEEL Grazing light


8479011

MICRO FULL STAINLESS STEEL Grazing light - LED 3000K
1 Opening


Product features

Body and head in AISI 316L stainless steel. Fixing with o rings. No visible screws and fixed to the outer housing with a clip on system. IP68 protection with Full Dry system which avoids condensation inside the product. The installation of the recessed housing in cast concrete with a 20-30 cm gravel soakaway. Only an IP68 connection to the power supply can guarantee the same protection to the fixture. Outer housing and connector to be ordered separately.

Technical dimensions




Lighting information



Plug-in power	2,90 W
Real flux	15 lm
Maximum intensity	1200 cd/klm
Beam angle	1 Opening

Lighting Simulation

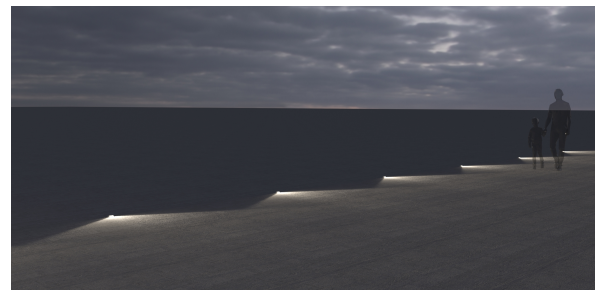

1 Opening

simulation made with MICRO FULL STAINLESS STEEL
Grazing light 2,9 W 3000K

Optics:	1 Opening
Code:	8479011
Distance between products:	3 m

Plug-in power	2,90 W
Real flux	15 lm
Maximum intensity	1200 cd/klm
Beam angle	1 Opening

Technical shipping information

Net weight	1,10 kg
Gross weight	1,25 kg
Packaging width	160,00 mm
Packaging height	160,00 mm
Packaging depth	150,00 mm

Platek®

PLATEK s.r.l.
Via Paderno, 19 | 25050 Rodengo Saiano (BS) ITALY
P.IVA 03320290178 | Codice fiscale 03007130176
Registro delle Imprese di Brescia n. 03007130176 REA 311057
Capitale sociale Euro 1.000.000,00 i.v. Società con unico socio

Last update:22/03/2022




MICRO FULL STAINLESS STEEL Grazing light


8479011

MICRO FULL STAINLESS STEEL Grazing light - LED 3000K
1 Opening



Mechanical accessories



8945035
Recessed box \varnothing 88 mm H. 100 mm



8945036
Recessed box H. 100 mm with base \varnothing 150 mm



8945037
Recessed box \varnothing 88 H. 97 mm with square
base 200 mm

Platek®

PLATEK s.r.l.
Via Paderno, 19 | 25050 Rodengo Saiano (BS) ITALY
P.IVA 03320290178 | Codice fiscale 03007130176
Registro delle Imprese di Brescia n. 03007130176 REA 311057
Capitale sociale Euro 1.000.000,00 i.v. Società con unico socio

Last update: 22/03/2022



MICRO FULL STAINLESS STEEL Grazing light


8479011

MICRO FULL STAINLESS STEEL Grazing light - LED 3000K
1 Opening

Electrical accessories



8917004
IP68 IN/OUT connector for 3x4 mm² cable



8917014
IP68 connector for 3x1,5 mm² cable



MICRO FULL STAINLESS STEEL Grazing light

8479011

MICRO FULL STAINLESS STEEL Grazing light - LED 3000K
1 Opening

The process of galvanisation and multi-coating protection

Platek goes well beyond the standards required for conventional protection processes, making use of its longstanding and in-depth expertise in aluminium alloys. All the aluminium components of the products - extruded, die-cast or turned - are subjected to a galvanic anodizing process in the phase following mechanical processing. The process increases their wear resistance and improves the adhesion of the paint. Galvanization involves three distinct phases: mechanical satin finishing and surface degreasing, anodic oxidation and fixing. After the first phase that eliminates any impurities, the aluminium body is immersed in special electrolytic tanks, in which the aluminium surface is transformed into aluminium oxide, which makes the metal more resistant. To respond optimally to the needs of the global market, all Platek products undergo a two-layer painting process. After preparation with washing and rinsing in accordance with the strictest environmental standards, the product is coated with an epoxy primer which guarantees, in addition to anodizing, an excellent degree of protection. The final step is the preparation of the polyester powder which gives the final velvety finish of the component. These last two phases, being done in a continuous cycle, form a single high-thickness layer that is resistant to the action of UV rays and atmospheric agents. This process allows corrosion resistance in salt fog that far exceeds the average standards of the market to be achieved.

The gluing process and plasma treatment

One of the most complex and delicate aspects in outdoor lighting products is the fitting of glass onto the lighting body. This must ensure over time an excellent degree of insulation from atmospheric agents, even in harsh environmental conditions, to maintain a stable performance with zero maintenance. The gluing process of the glass on Platek products is managed at an automated workstation, preceded by a pre-treatment of the surfaces with atmospheric pressure plasma. Pre-treatment modifies the characteristics and ionic properties of the treated surfaces, activates the polar materials at strategic points, removes any residue of detaching agents, such as silicones and oils with a precision microcleaning, favouring excellent wettability of the bonded surfaces and a stable seal in time. The gluing process of the glass with specific plasma treatment allows a bonding force four times greater than similar products to be obtained. The shaping of the surfaces is followed by the application of the silicone and the assembly of the glass onto the lighting body using an automated process that guarantees perfect sealing of the lamp.

Precise LED selection

All LEDs used by Platek, once assembled by trusted personnel are tested with suitable instruments to check the colour specification required by Platek standards. The choice of using only 3 McAdams colour steps and with a CRI value exceeding 90, provide a high level of light quality that is difficult to find in the world of outdoor lighting. As far as LED products are concerned, Platek has adopted a system of protection against electrostatic discharge along the entire production chain of electronic components to increase the resistance of circuits to power surges.

Platek®

PLATEK s.r.l.
Via Paderno, 19 | 25050 Rodengo Saiano (BS) ITALY
P.IVA 03320290178 | Codice fiscale 03007130176
Registro delle Imprese di Brescia n. 03007130176 REA 311057
Capitale sociale Euro 1.000.000,00 i.v. Società con unico socio

Last update:22/03/2022