
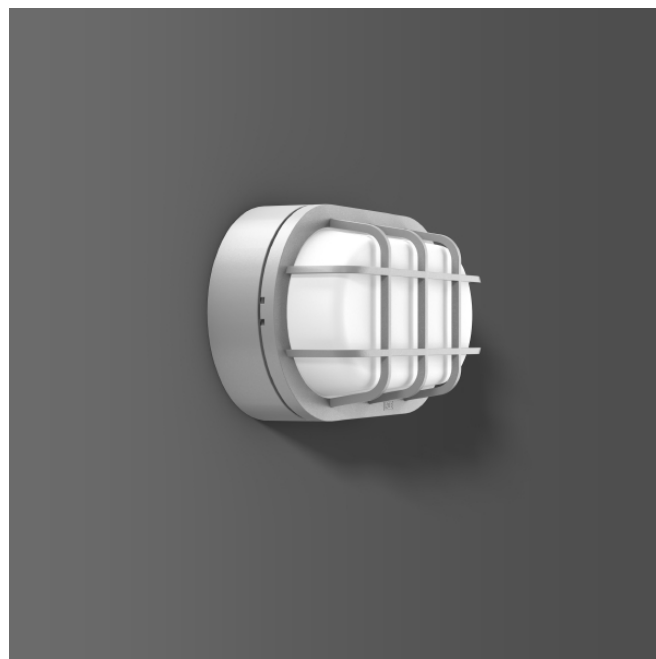


# Alu-Lux oval

582064.004.25 | Ceiling and wall luminaires

Ceiling and wall luminaires  
4051859494065  
LED  
L 258, B 148, H 95



Decorative surface-mounted luminaire for outdoor use. Housing made of corrosion-resistant die-cast aluminium, seawater resistant powder-coated. With membrane valve to avoid condensation. Crystal glass: matt inside. Shadow-free, homogeneous and soft illumination. Base fixing slots outside of gasketed area, drill hole deviations can be compensated. Separate connection compartment for direct connection of rigid cables up to 3 x 2.5 mm<sup>2</sup>. Replaceable LED module. With integrated daylight sensor.

## Colour

Colour silver metallic

## Dimensions

Length L 258 mm  
Width B 148 mm  
Height H 95 mm  
Weight 2 kg

## Lamp

Lamp 1 LED  
Colour temperature lamp 1 3000K  
Colour rendering index (CRI) 1 80  
Colour consistency (McAdam) 1 3  
Lifetime of lamp 1 combined 50000 h (L70/B50)  
Photobiological safety according to EN 62471 Risk group 1

## Lighting technology

Colour temperature 3.000 K  
Rated luminous flux 670 lm  
Glare evaluation UGR (4H 8H) 1 23,1  
Beam angle 134° / 120°

## Electrical

Control gear	Converter not necessary
Voltage	230 V / 50 Hz
System power	12 W
Luminaire efficacy	56 lm/W

## Approbations

Type of Protection	IP 65
Protection Class	I
Glow Wire Test	960°C - 30 seconds
Impact Protection	IK07 (2 Joule)
Safety marks	F-mark
Ambient temperature min.	-20 °C
Ambient temperature max.	30 °C
ULOR	11,5 %
Trade mark	CE
CIE Flux Code / CEN Flux Code	39 68 88 89 100
Energy efficiency class LED	A++
Energy class of included lamp	A++