




Zero Maxi




5 / Product Color / Ürün Renk

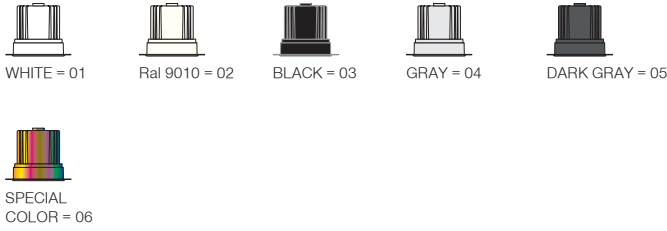

Technical Drawing / Teknik Çizim

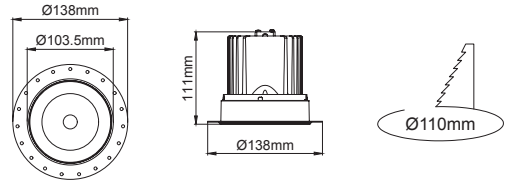

4 / Reflector Angle / Reflektör Açısı

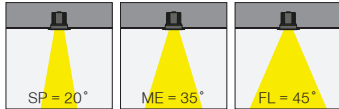

* See page 756 for ldt files. / Işık eğrileri için sayfa 756 bakınız.

EN

- Die-cast aluminium body.
- Mains voltage: 220-240V / 50-60Hz.
- Clever thermal design with passive heat dissipation.
- Clear safety glass.
- Classic dimming systems of DALI, 1-10V and Phase-Cut Dim options.
- High tech control systems of Tuneable White, Warm Dim and Wireless Dim options.
- Basic colours: White, Black, Gray, Dark Gray, RAL9010 and special color options.
- Available accessories are Honeycomb Filter and Colour Filter.
- Spot, Medium and Flood beam angle options available with rotationally symmetric light distribution.
- Standart CRI>80, high CRI>90 and super high CRI>98 LED options available.
- Up to 136lm/W efficiency.
- High colour consistency: <3 SDCM
- Emergency kit system can be integrated.

TR

- Alüminyum enjeksiyon gövde.
- 220-240V / 50-60Hz enerji girişi.
- Pasif soğutma teknolojisine sahip akıllı soğutma tasarımı.
- Tamperli cam.
- Klasik DALI, 1-10V ve Faz DIM seçenekleri uygulanabilir.
- Yüksek teknoloji kontrol sistemleri olan Kablosuz DIM, Sıcak DIM ve Dinamik Beyaz uygulamaları yapılabilir.
- Standart renk seçenekleri: Beyaz, Siyah, Gri, Koyu Gri, RAL9010 yanında isteğe bağlı özel renk seçenekleri uygulanabilir.
- Balpeteği Filtresi ve Renk Filtresi aksesuar seçenekleri uygulanabilir.
- Dar, Orta ve Geniş reflektör açısı seçenekleri mevcuttur.
- Standart CRI>80, yüksek CRI>90 ve ekstra yüksek CRI>98 LED seçenekleri mevcuttur.
- 136lm/W'a varan verim.
- Yüksek renk uyumu: <3 SDCM
- Acil aydınlatma kit sistemi uygulanabilir.

Zero Maxi

Zero Maxi / I01.MLR.14046



* Code example / Kod örneği:

I01.MLR.14046 . 28 . 827 . SP . 01

- 1- Product code / Armatür kodu
- 2- Power / Güç
- 3- CRI / Kelvin
- 4- Reflector angle / Reflektör açısı
- 5- Colour / Ürün renk

Power / Güç	CRI	Order Code / Sipariş Kodu	Kelvin	Lümen T _c =50° Lümen
28W	CRI>80	I01.MLR.14046 . (.) . (...) . (.) . (.)	2700K	3167
			3000K	3265
			3500K	3330
			4000K	3397
			5000K	3465
	CRI>90	I01.MLR.14046 . (.) . (...) . (.) . (.)	2700K	2945
			3000K	3037
			3500K	3097
			4000K	3159
			5000K	X
	CRI>98	I01.MLR.14046 . (.) . (...) . (.) . (.)	2700K	2268
			3000K	2338
			4000K	2432
	Meat / Et COB	I01.MLR.14046 . (.) . (...) . (.) . (.)	1800K	1841
	Food / Gıda COB	I01.MLR.14046 . (.) . (...) . (.) . (.)	2400K	1900
	FISH / Balık COB	I01.MLR.14046 . (.) . (...) . (.) . (.)	6600K	2507

2	Watt - Driving Current / Watt - Sürüş Akımı	3		4		5				
		CRI / Kelvin		Reflector Angle / Reflektör Açısı		Product Color / Ürün Renk				
28	28W - 700mA	827	CRI>80 - 2700K	9827	CRI>98 - 2700K		SP 20° - Spot		01	white
24	24W - 600mA	830	CRI>80 - 3000K	9830	CRI>98 - 3000K		ME 35° - Medium		02	ral 9010
20	20W - 500mA	835	CRI>80 - 3500K	9840	CRI>98 - 4000K		FL 45° - Flood		03	black
15	15W - 350mA	840	CRI>80 - 4000K						04	gray
		850	CRI>80 - 5000K						05	dark gray
		927	CRI>90 - 2700K						06	special color
		930	CRI>90 - 3000K							
		935	CRI>90 - 3500K							
		940	CRI>90 - 4000K							



- Inner front ring has different finishing options.
- Armatürün iç çemberi farklı renk ve kaplama seçeneklerine sahiptir.



— Chrome plate / Krom kaplı



— Matt chrome plate / Mat krom kaplı



— Black painted / Siyah boyalı



— White painted / Beyaz boyalı



— Copper plated / Bakır kaplamalı