



Bari Q LED



Modern and universal downlight luminaire of high lighting performance, based on LED module. Application: offices, hotels, restaurants, halls, shopping malls.

Tolerance of luminance power and luminous flux: +/-10%

Materials: Powder painted, white aluminium body, OPAL diffuser.

Installation: Into plaster cardboard and modular ceilings.

Accessories: housing for surface mounting

Power: 230 V

ELECTRICAL DATA

Light source	LED
Number of light sources	1
Type of equipment	AC
Voltage rating	220 ... 240 V
Light source included	Yes

INFORMATION

Colour	White
--------	-------

CERTIFICATES

Degree of protection (IP)	IP44
Degree of protection (IP) / top/	IP20
Class of protection	II
Light source protection	Yes
CE	Yes
HACCP+	Yes

LIGHT DATA


Light colour	White
Light distribution	DI
Light output degradation	B10
Lumen maintenance	L70
Lifetime	> 50000 h

OPTICAL DATA

Louver/ shutter	OPAL
Diffuser colour	White
Diffuser material	Opal/mat plastic

AVAILABE VARIANTS

Product code	Luminaire power [W]	Luminaire luminous flux [lm]	Luminaire's luminous efficacy [lm/W]	Colour temperature	Info
EU001.1111.830.A000	11	1480	135	3000K	155mm
EU001.1111.840.A000	11	1510	137	4000K	155mm
EU002.1111.830.A000	16	2040	128	3000K	155mm
EU002.1111.840.A000	16	2090	131	4000K	155mm
EU003.1111.830.A000	17	2410	142	3000K	225mm
EU003.1111.840.A000	17	2460	145	4000K	225mm
EU004.1111.830.A000	22	2950	134	3000K	225mm
EU004.1111.840.A000	22	3020	137	4000K	225mm
EU005.1111.830.A000	26	3510	135	3000K	225mm
EU005.1111.840.A000	26	3590	138	4000K	225mm

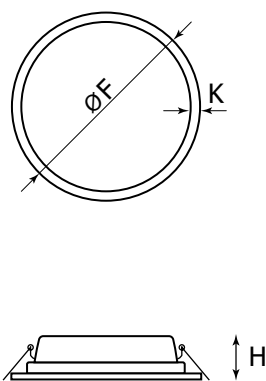

DIMENSIONS

Product code	H [mm]	F [mm]	K [mm]	J [mm]
EU001.1111.830.A000	40	155	15	13
EU001.1111.840.A000	40	155	15	13
EU002.1111.830.A000	40	155	15	13
EU002.1111.840.A000	40	155	15	13
EU003.1111.830.A000	40	225	15	15
EU003.1111.840.A000	40	225	15	15
EU004.1111.830.A000	40	225	15	15
EU004.1111.840.A000	40	225	15	15
EU005.1111.830.A000	40	225	15	15
EU005.1111.840.A000	40	225	15	15

H = Height / Depth | F = Outer diameter | K = Additional dimension | J = Additional dimension

ACCESSORIES

Structural element



BARI Q LED Surface mounting housing
Pieces in set: 1

FL030.11.0155 ØF=155mm;
H=75mm White

FL030.11.0225 ØF=225mm;
H=79mm White

BARI Q LED 225mm




BARI Q LED 155mm




BARI Q LED 155mm



BARI Q LED 155mm - OPAL diffuser

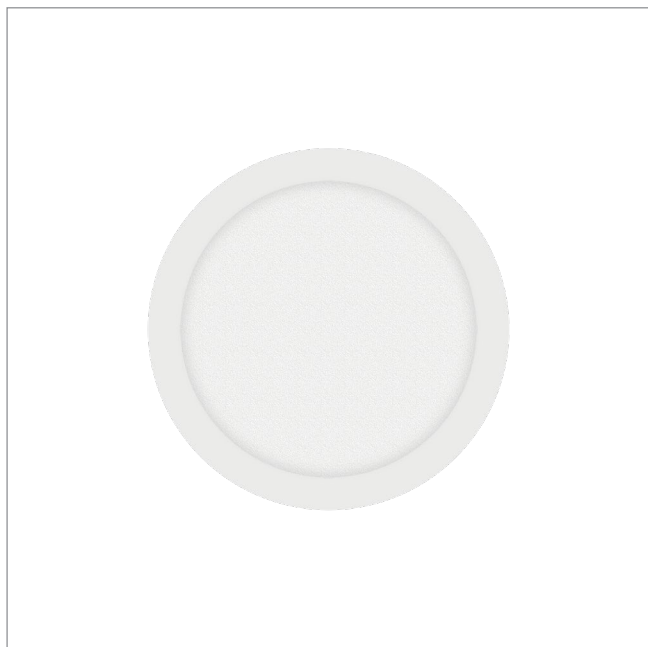

BARI Q LED 225mm - OPAL diffuser

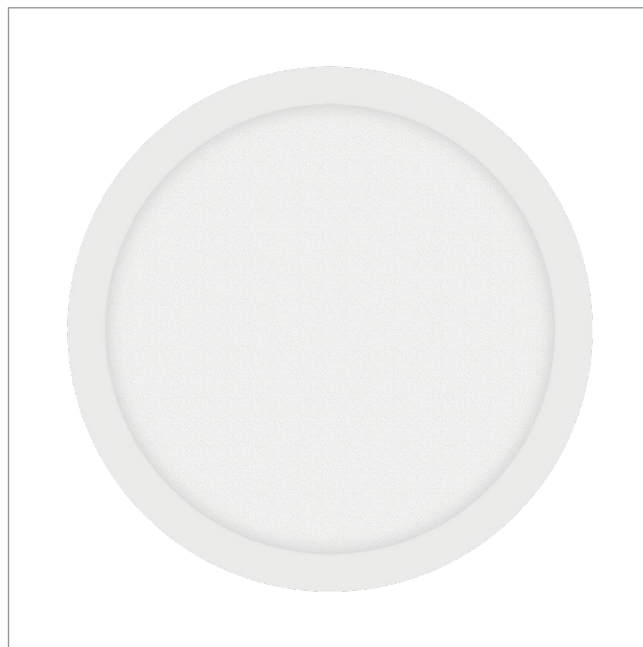

BARI Q NT LED 225mm



BARI Q LED - ceiling cross section



BARI Q LED



BARI Q LED recessed



BARI Q NT LED



